



# **MASTER PL-C 2 Pin**



# MASTER PL-C 18W/865/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

### **Warnings and Safety**

- $\cdot$  Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- · Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

| General information             |                     |
|---------------------------------|---------------------|
| Cap-Base                        | G24D-2 [ G24d-2]    |
| Life To 10% Failures (Nom)      | 6500 h              |
| Life to 50% Failures (Nom)      | 10000 h             |
| LSF 2000 h Rated                | 99 %                |
| LSF 4000 h Rated                | 98 %                |
| LSF 6000 h Rated                | 92 %                |
| LSF 8000 h Rated                | 78 %                |
| Flux measurement reference      | Sphere              |
|                                 |                     |
| Light technical                 |                     |
| Colour Code                     | 865 [ CCT of 6500K] |
| Luminous Flux (Nom)             | 1150 lm             |
| Luminous Flux (Rated) (Nom)     | 1120 lm             |
| Colour Designation              | Cool Daylight       |
| Chromaticity Coordinate X (Nom) | 0.313               |
|                                 | -                   |

| Chromaticity Coordinate Y (Nom)      | 0.337   |
|--------------------------------------|---------|
| Colour Temperature, horizontal (Nom) | 6500 K  |
| Luminous Efficacy (rated) (Nom)      | 67 lm/W |
| Colour Rendering Index horiz (Nom)   | 80      |
| Depreciation 2000 hrs                | 90 %    |
| LLMF 4000 h Rated                    | 85 %    |
| Depreciation 5000 hrs                | 81 %    |
| LLMF 8000 h Rated                    | 77 %    |
|                                      |         |
| Operating and electrical             |         |
| Power (Rated) (Nom)                  | 18.3 W  |
| Lamp Current (Nom)                   | 0.230 A |
|                                      |         |
| Temperature                          |         |
| Design Temperature (Nom)             | 28 °C   |
|                                      |         |


Datasheet, 2022, November 29 data subject to change

## **MASTER PL-C 2 Pin**

| Controls and dimming          |        |
|-------------------------------|--------|
| Dimmable                      | No     |
|                               |        |
| Mechanical and housing        |        |
| Cap-Base Information          | 2P     |
|                               |        |
| Approval and application      |        |
| Energy Efficiency Class       | G      |
| Mercury (Hg) Content (Max)    | 1.4 mg |
| Mercury (Hg) Content (Nom)    | 1.4 mg |
| Energy Consumption kWh/1000 h | 19 kWh |
| EPREL Registration Number     | 423285 |
|                               |        |

| Product data                    |                                    |
|---------------------------------|------------------------------------|
| Full product code               | 871150063527370                    |
| Order product name              | MASTER PL-C 18W/865/2P 1CT/5X10BOX |
| EAN/UPC - Product               | 8711500635273                      |
| Order code                      | 63527370                           |
| Numerator - Quantity Per Pack   | 1                                  |
| Numerator - Packs per outer box | 50                                 |
| Material Nr. (12NC)             | 927905786540                       |
| Net Weight (Piece)              | 57.800 g                           |
| ILCOS Code                      | FSQ-18/65/1B-I-G24d=2              |


### Dimensional drawing




MASTER PL-C 18W/865/2P 1CT/5X10BOX

# Product D (max) D1 (max) A (max) B (max) C (max) MASTER PL-C 18W/865/2P 27.1 mm 27.1 mm 109.5 mm 128.0 mm 150.4 mm 1CT/5X10BOX

### Photometric data

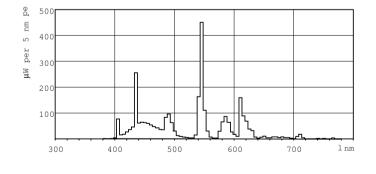


Lightcolour /865

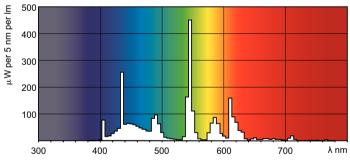

Lightcolour /865

### **MASTER PL-C 2 Pin**


### Lifetime

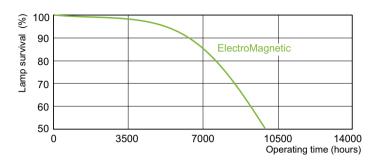



### LDLE\_PLC2P\_0001-Life expectancy diagram



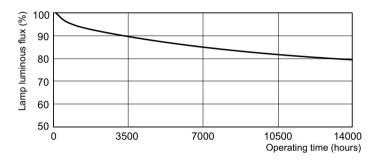

LDLM\_PLC2P\_0001-Lumen maintenance diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.