
PHILIPS Lighting



Tornado High Lumen

Tornado High Lumen 60W CDL E27 1CT/6

Energy saving lamp in spiral shape, with superior performance (long life, high switching) and high lumen warm bright light. Perfectly suitable to be used in places where high lumen is required, and the lamp is directly visible.

Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Product data

| General information | | LLMF At End Of Nominal Lifetime (Nom) | 60 % |
|-------------------------------------|---------------------|---------------------------------------|-------------|
| Cap-Base | E27 [E27] | | |
| Nominal Lifetime (Nom) | 10000 h | Operating and electrical | |
| Switching Cycle | 10000X | Input Frequency | 50 or 60 Hz |
| ated Lifetime (Hours) | 10000 h | Power (Rated) (Nom) | 60.0 W |
| | | Lamp Current (Nom) | 270 mA |
| ight technical | | Starting Time (Nom) | 1.5 s |
| Colour Code | 865 [CCT of 6500K] | Warm Up Time to 60% Light (Max) | 60 s |
| uminous Flux (Nom) | 4300 lm | Power Factor (Nom) | 0.92 |
| uminous Flux (Rated) (Nom) | 4300 lm | Voltage (Nom) | 220-240 V |
| lour Designation | Cool Daylight | | |
| umen Maintenance 2000 h (Nom) | 88 % | Controls and dimming | |
| Chromaticity Coordinate X (Nom) | 313 | Dimmable | No |
| hromaticity Coordinate Y (Nom) | 337 | | |
| olour Temperature, horizontal (Nom) | 6500 K | Mechanical and housing | |
| uminous Efficacy (rated) (Nom) | 71.63 lm/W | Bulb Shape | Spiral |
| Colour Rendering Index horiz (Nom) | 80 | | |

Tornado High Lumen


| Approval and application | | | |
|-------------------------------|--------------------------------------|--|--|
| Mercury (Hg) Content (Max) | 5 mg | | |
| Energy Consumption kWh/1000 h | 60 kWh | | |
| | | | |
| Product data | | | |
| Full product code | 872790080721900 | | |
| Order product name | Tornado High Lumen 60W CDL E27 1CT/6 | | |

8727900807219

| Order code | 80721900 |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929676006201 |
| Net Weight (Piece) | 0.300 kg |
| | |

Dimensional drawing

EAN/UPC - Product

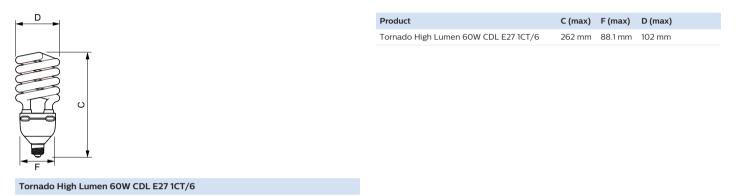



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, August 7 - data subject to change