



CorePro LEDcandle

CorePro lustre ND 3.5-25W E14 840 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.


Product data

General Information		Warm-up time to 60% light (nom.)	
Cap base	E14 [E14]		0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.4
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
Technical type	3.5-25W	T-Case maximum (nom.)	75 °C
Light Technical		Controls and Dimming	
Colour Code	841 [CCT of 4100K (841)]	Dimmable	No
Luminous flux (nom.)	290 lm	Mechanical and Housing	
Colour designation	Cool White (CW)	Lamp Finish	Frosted
Correlated Colour Temperature (Nom)	4000 K	Bulb shape	P45 [P 45mm]
Luminous efficacy (rated) (nom.)	82.86 lm/W	Approval and Application	
Colour consistency	<6	Energy consumption kWh/1,000 hours	4 kWh
Colour rendering index (nom.)	80	Product Data	
LLMF at end of nominal lifetime (nom.)	70 %	Full product code	871869654352800
Operating and Electrical		Order product name	CorePro lustre ND 3.5-25W E14 840 P45 FR
Input frequency	50 to 60 Hz	EAN/UPC – product	8718696543528
Power (Rated) (Nom)	3.5 W	Order code	54352800
Lamp current (nom.)	35 mA	SAP numerator – quantity per pack	1
Wattage equivalent	25 W		
Starting time (nom.)	0.5 s		

CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001205702
SAP net weight (piece)	0.040 kg



Dimensional drawing



LED ND 3.5-25W E14 840 P45 FR


Product	D	C
CorePro lustre ND 3.5-25W E14 840 P45 FR	45 mm	88 mm

Photometric data

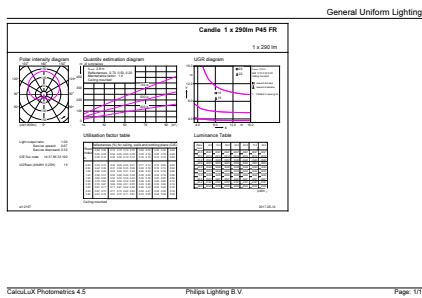

CorePro LEDlustre 25W E14 840 FR P45

CorePro LEDlustre 25W E14 840 FR P45

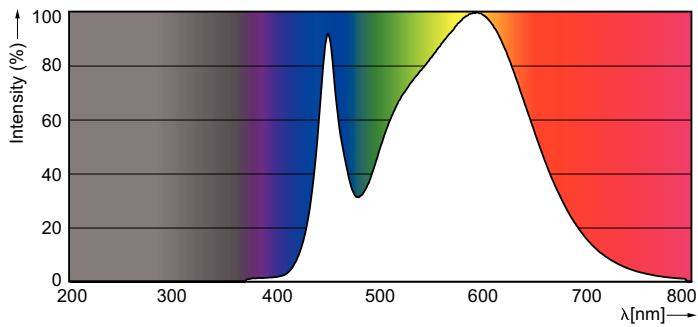


SDPO_LEDLSR_0006-Spectral Power distribution

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38

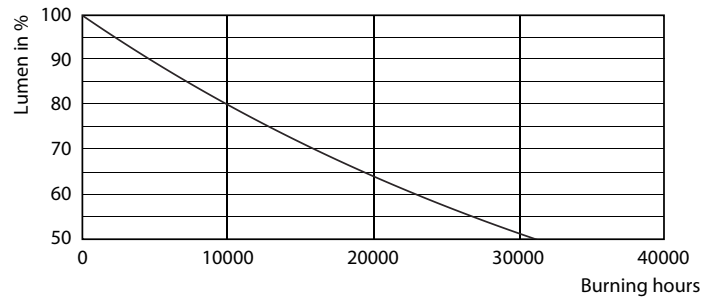

LEDbulb 60W E14 827 FR B38

