



CorePro LEDcandle

CorePro LEDcandle ND 3.5-25W E14 840 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LED lamps deliver huge energy savings and minimize maintenance cost.


Product data

General Information		Warm-up time to 60% light (nom.)	
Cap base	E14 [E14]		0.5 s
EU RoHS compliant	Yes	Power factor (nom.)	0.4
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50,000X	Temperature	
Technical type	3.5-25W	T-Case maximum (nom.)	75 °C
Light Technical		Controls and Dimming	
Colour Code	841 [CCT of 4100K (841)]	Dimmable	No
Luminous flux (nom.)	290 lm	Mechanical and Housing	
Colour designation	Cool White (CW)	Lamp Finish	Frosted
Correlated Colour Temperature (Nom)	4000 K	Bulb shape	B35 [B 35mm]
Luminous efficacy (rated) (nom.)	82.86 lm/W	Approval and Application	
Colour consistency	<6	Energy consumption kWh/1,000 hours	4 kWh
Colour rendering index (nom.)	80	Product Data	
LLMF at end of nominal lifetime (nom.)	70 %	Full product code	871869654348100
Operating and Electrical		Order product name	CorePro LEDcandle ND 3.5-25W E14 840 B35 FR
Input frequency	50 to 60 Hz	EAN/UPC – product	8718696543481
Power (Rated) (Nom)	3.5 W	Order code	54348100
Lamp current (nom.)	35 mA	SAP numerator – quantity per pack	1
Wattage equivalent	25 W		
Starting time (nom.)	0.5 s		

CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001205602
SAP net weight (piece)	0.040 kg



Dimensional drawing



LED ND 3.5-25W E14 840 B35 FR

Product	D	C
CorePro LEDcandle ND 3.5-25W E14 840 B35 FR	35 mm	106 mm

Photometric data

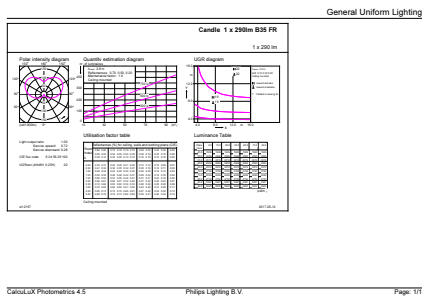

CorePro LEDcandle 25W E14 840 FR B35

CorePro LEDcandle 25W E14 840 FR B35




SDPO_LEDCL_0005-Spectral Power distribution

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38

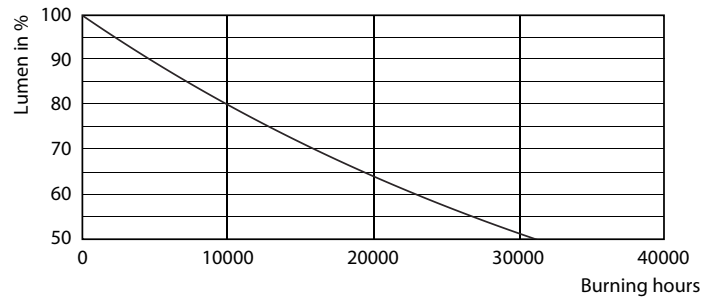

LEDbulb 60W E14 827 FR B38

