



Classia

USB Type A+A charger - 15 W  
 USB Type A+C charger - 15 W

RW4191AA - RA4191AA - RG4191AA  
 RW4191AC - RA4191AC - RG4191AC

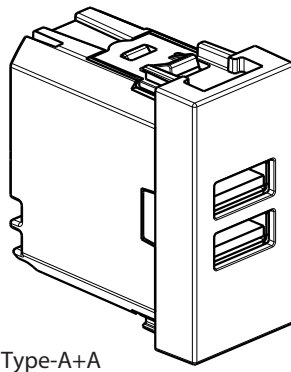

Type-A+A

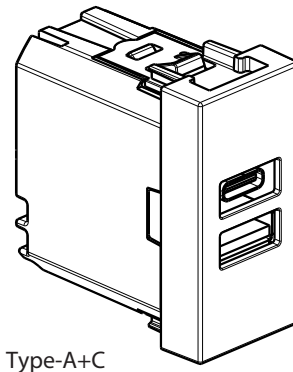

Type-A+C

**1. USE**


For recharging portable devices such as phones, smartphones, MP3 or MP4, loudspeakers, watches, game consoles, powerbanks.

**2. RANGE**

Designation	Item
USB charger TYPE A + A	<input type="checkbox"/> RW4191AA
	<input type="checkbox"/> RA4191AA
	<input type="checkbox"/> RG4191AA
USB charger TYPE A+C	<input type="checkbox"/> RW4191AC
	<input type="checkbox"/> RA4191AC
	<input type="checkbox"/> RG4191AC

Color code:  White  Aluminum  Black

**3. OVERALL DIMENSIONS**

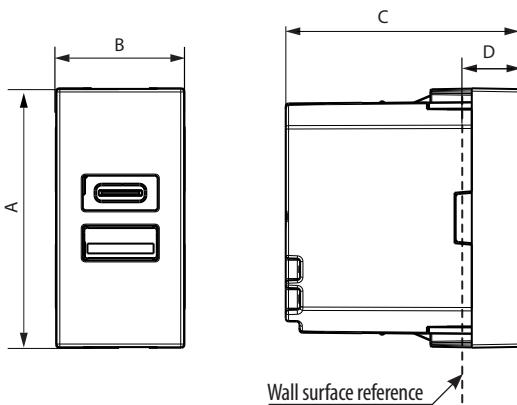

A	B	C	D
45.1	22.3	41	9.8

**4. CONNECTION**

Type of terminals: with screws  
 Terminal capacity: 1 x 2.5 mm<sup>2</sup>  
 Stripping length: 6 mm  
 Circuit Breaker: MAX. 16 A

**Necessary safety precautions:**



Switch OFF the power at the main circuit breaker. Make sure that the power is OFF before continuing with the installation.

**5. TECHNICAL CHARACTERISTICS**

**5.1 Mechanical characteristics**

Impact tests: IK 04  
 Penetration by solid bodies/liquid: IP 40

**5.2 Material characteristics**

Base: PC V-0 class  
 Cover: PC V-0 class

**Self-extinguishing:**

850°C/30 s for insulating components holding live parts in place.  
 650°C/30 s for other insulating components.

**5.3 Electrical characteristics**

All values listed below are measured at an ambient temperature of + 20° and after 30 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Nominal input current	0.5 A
Nominal output current	3.0 A
Output power	15 W
Nominal output voltage	5.0 V=
Average efficiency in active mode	85 %
Stand-by power consumption	< 0.1 W
Consumption class without load and average level of efficiency: Level VI	
Protection class	II - Low voltage

**Note:** To optimize the charging time of your device, ensure turn it off during the charging phase.

**5.4 Climate characteristics**

Storage temperature: -20°C to +70°C  
 Operating temperature: 5°C to +40°C

**6. CLEANING**

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

**Caution:** Always test before using other special cleaning products

**7. STANDARDS AND APPROVALS**

Compliant with installation and manufacturing standards.  
 See e.catalogue