

MAUS STIXX PRO 5/10 INSTRUCTION MANUAL


Heat detection cable

Aerosol outlet surface

Connection port for HDC-cable

Screw holes

Adhesive backside

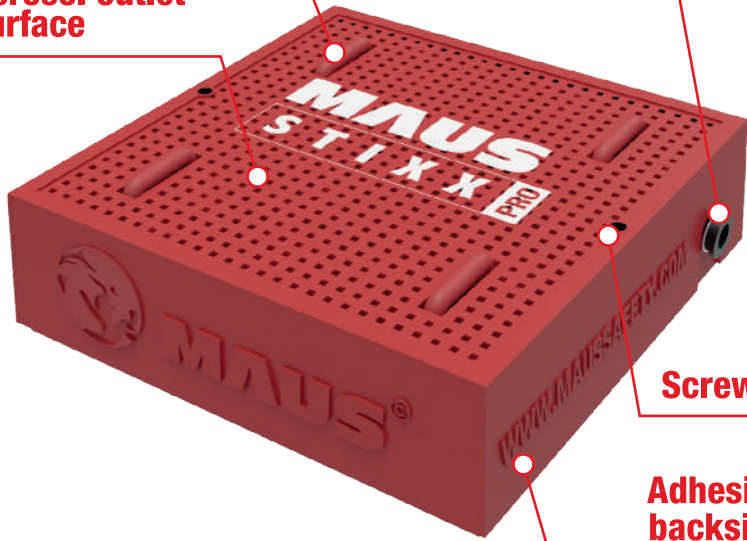

KEY FEATURES

100%**FLOODING**

Once activated it will release 100% of it's content.

**NON TOXIC**

The potassium formula is 100% non toxic & environmentally friendly.

**FAST**

Activation at very low temperature (170 °C).

**MAINTENANCE**

Maintenance free during its 5 year life span.

**SIZE**

With its small size you can place the unit anywhere.

**SYSTEM**





No complex system.
No wiring. No batteries.
No pressure.





**SERIAL CONNECTION**



You can easily protect a larger space by connecting more units.

**AWARD WINNING**

MAUS Stixx PRO series has won several awards in Europe.

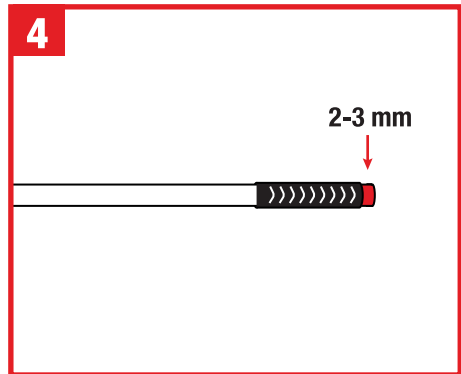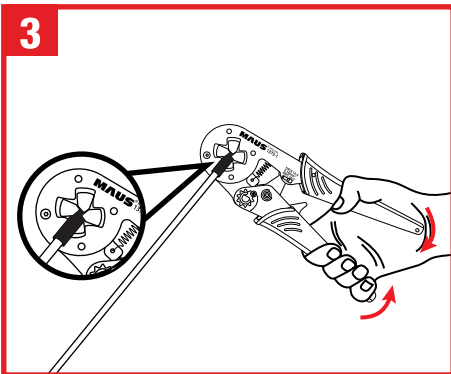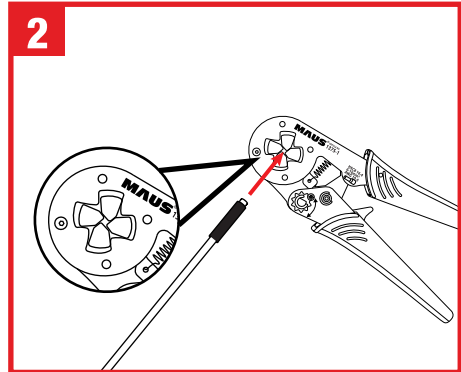
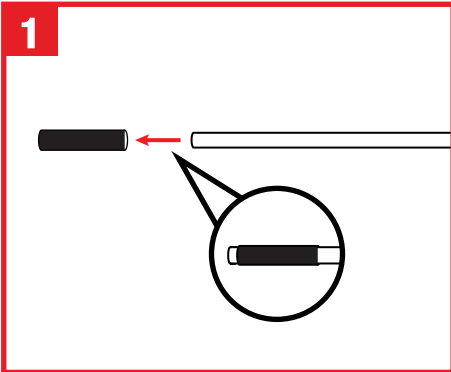


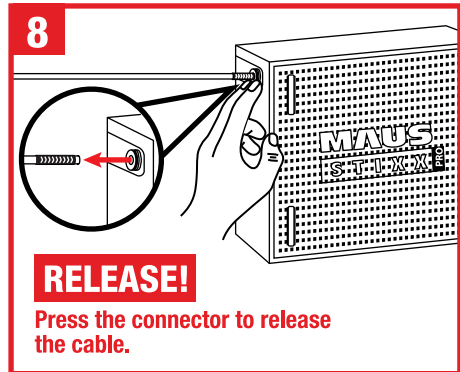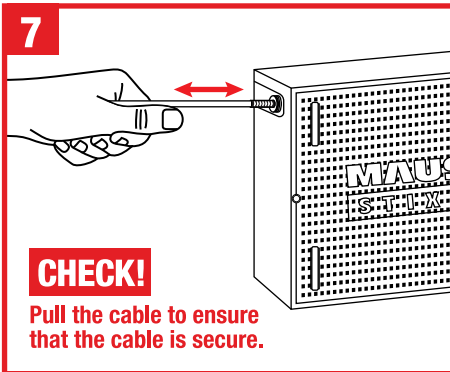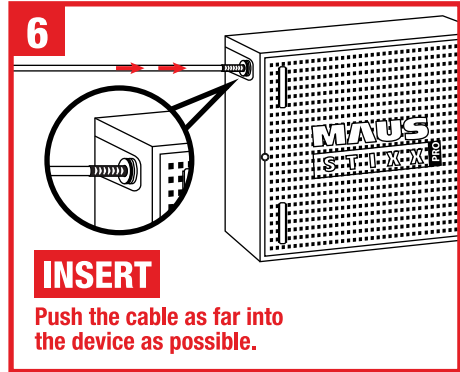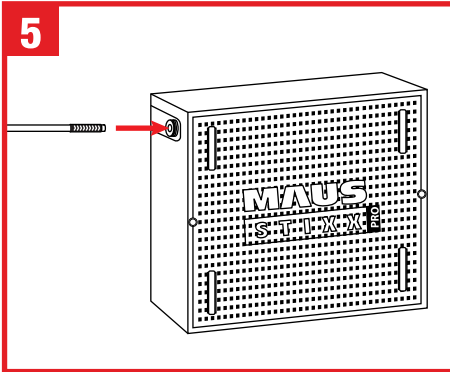



TAPE

AND/OR

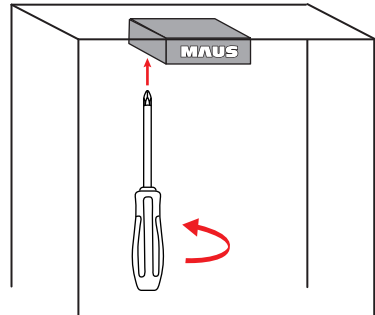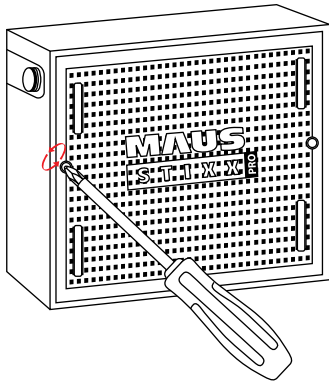



SCREWS

**Cable used for increased
area of detection**



Cable used for serial connection

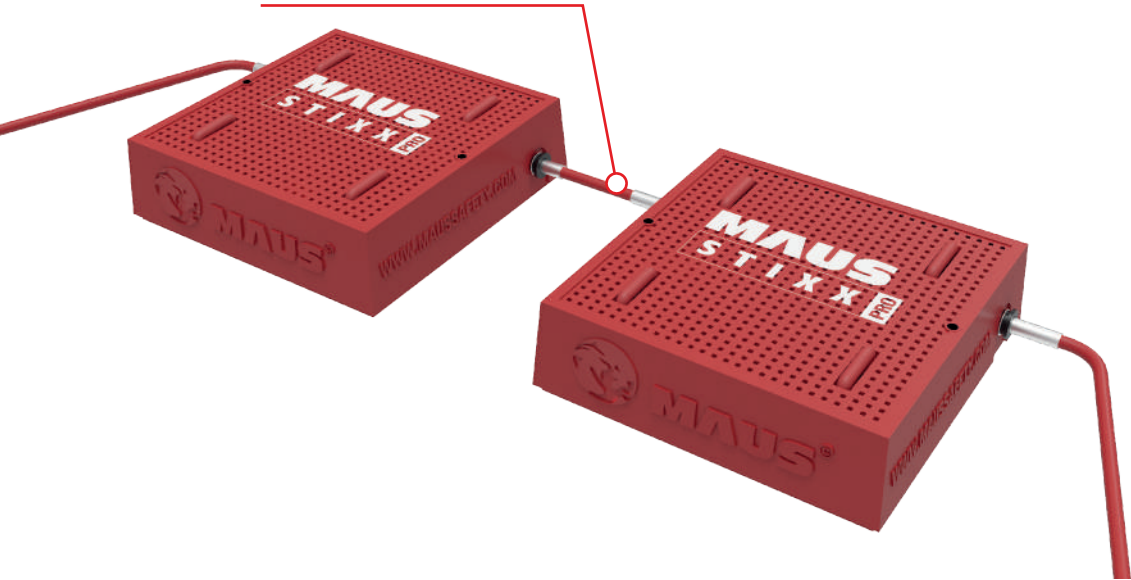

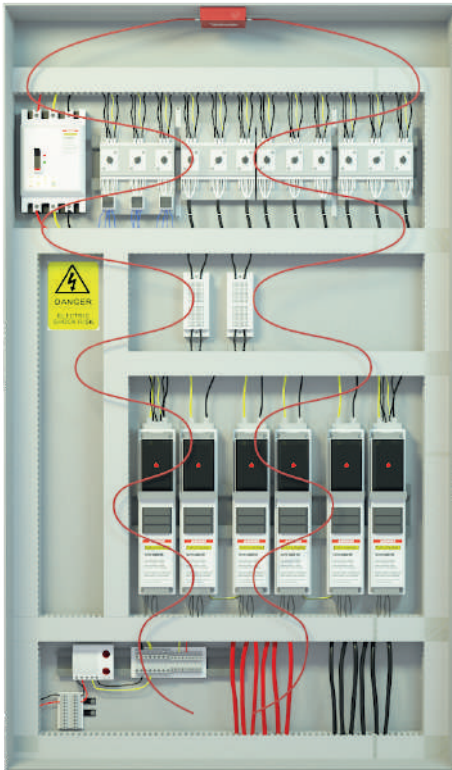

Make sure that the HDC cables are placed in the enclosure to optimise detection. Place the HDC cable close to every component that could be a potential fire hazard.



HDC Cable for MAUS Stixx PRO 5/10


This cable is to connect more units and for installing in the enclosure to increase the area of detection. The cable comes in 50 meter rolls and comes with 50 metal connectors. Art no: 1312-1.

NOTE! Can not be used with the EGO series.



Crimping tool

Professional tool to crimp the metal connector on to the HDC cable and to create the grooves on the metal connector that makes it secure once inserted in the MAUS Stixx Pro 5 or 10 units. Art no: 1375-1.

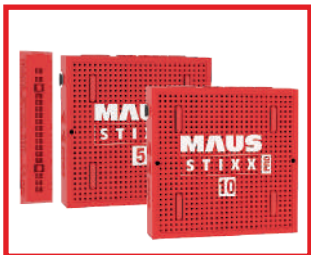

MAUS Stixx PRO 1, 5 and 10

Depending on the size of the enclosure you can choose either the MAUS Stixx PRO 1 (0,1 m³), MAUS Stixx PRO 5 (0,5 m³) or MAUS Stixx PRO 10 (1 m³).

NOTE! MAUS Stixx PRO 1 can not be connected with HDC cables.


EGO - FIRE SUPPRESSION SYSTEM BY MAUS®

WHEN THE SPACE IS LARGER



m³

Art no: 4003-100
Dimensions: 194 x 186 x H282 mm.
Protected space: 10 m³
CE Certified (CE 1521)

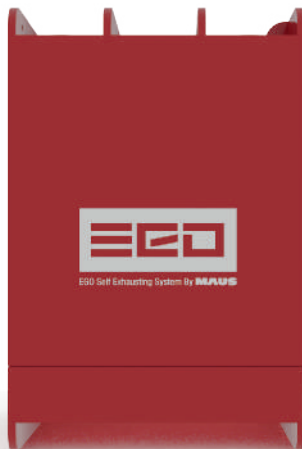


m³

Art no: 4003-150
Dimensions: 194 x 186 x H282 mm.
Protected space: 15 m³
CE Certified (CE 1521)

Protect up to 500 m³ with the EGO Series.

GET CERTIFIED ONLINE NOW.

15 MINUTE CERTIFICATION:



gomaus.com/elpro

SPECIFICATIONS:	STIXX PRO 5	STIXX PRO 10
<u>Art no:</u>	1360-1	1370-1
<u>Protected space:</u>	0,5 m ³	1,0 m ³
<u>Dimensions:</u>	60 x 60 x 20 mm	60 x 60 x 20 mm
<u>Weight:</u>	130 g	200 g
<u>Warranty / Service life:</u>	5 yrs. / 6 yrs.	5 yrs. / 6 yrs.
<u>Activation Temperature:</u>	170°C±10°C	170°C±10°C
<u>Discharge time:</u>	7s.	7s.
<u>Certification:</u>	CE 2829	CE 2829



MAUS

www.maussafety.com