


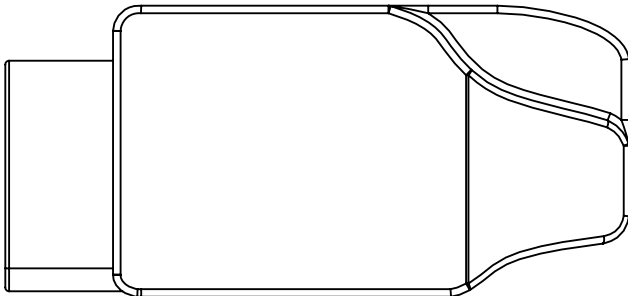
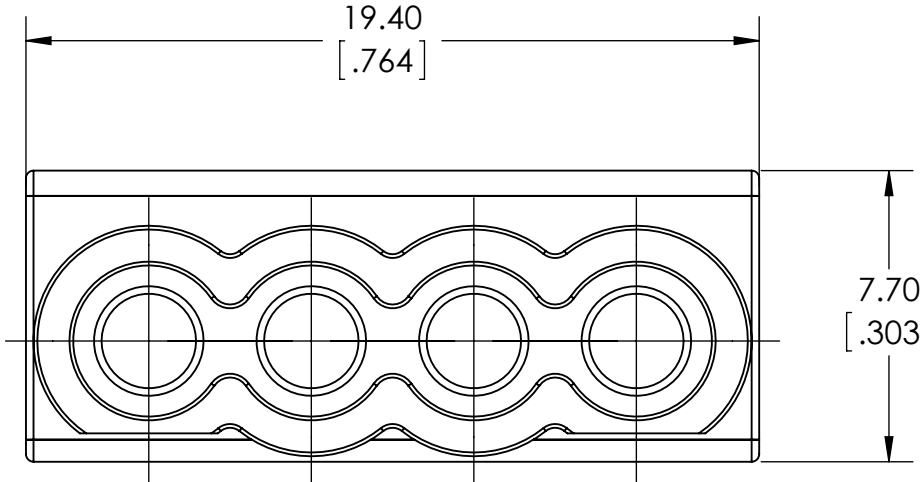


SW2015

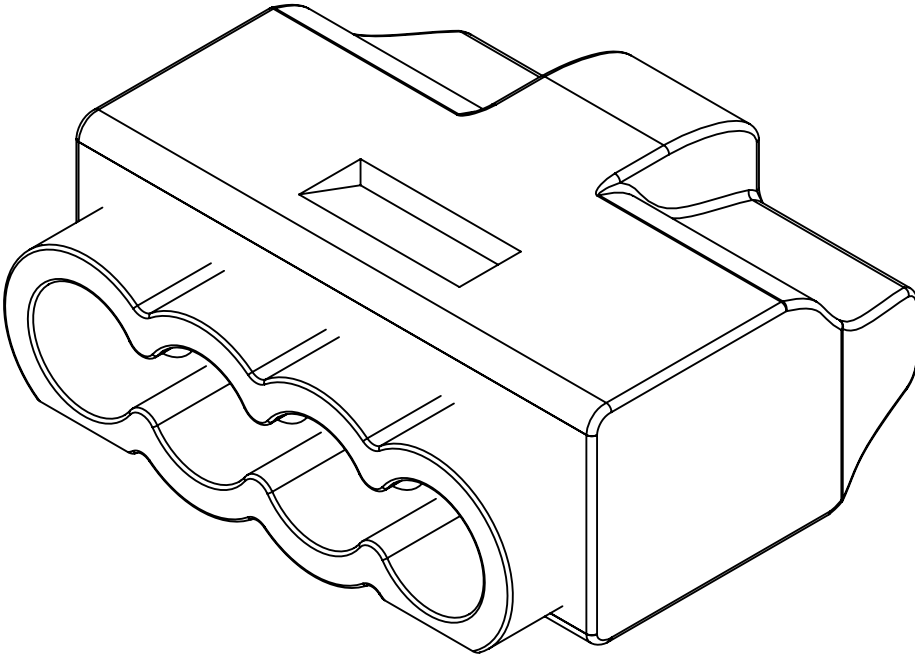

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.1	Design Release	-	SEE ECN# 013916	CAS	6/15/2017	KAC	6/15/2017

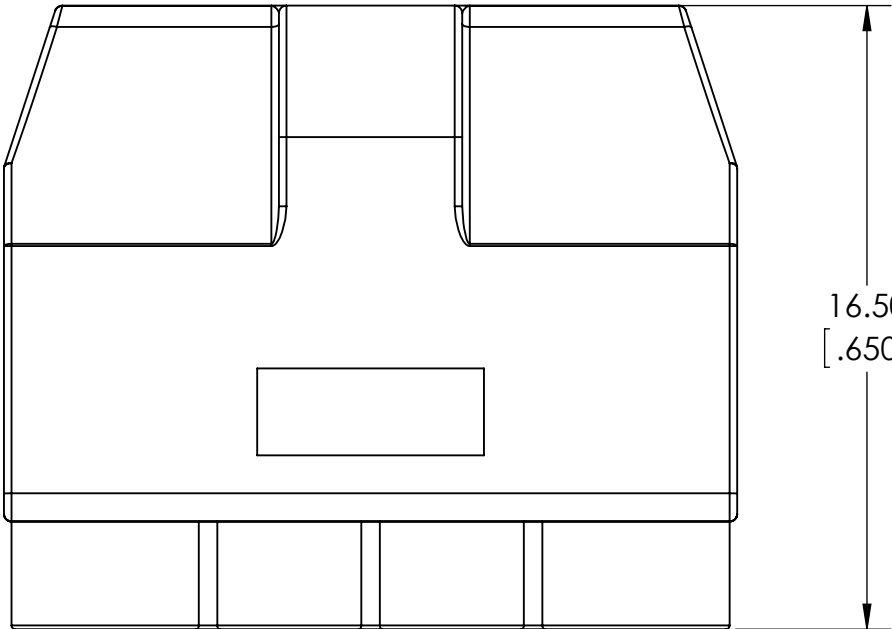

STRIPPING LENGTH:
11MM(.45 IN)

WIRE RANGE:
22-12 AWG SOLID CU / 22 - 14 AWG STRANDED
0.5 TO 2.5MM² SOLID CU / 1.0 TO 2.5MM² STRANDED

FLAMMABILITY:
UL94 V0

WORKING TEMP:
-30°C (-22°F) TO 85°C (185°F)

VOLTAGE:
450V (VDE) 85°C
600V (CULUS) 105°C

CERTIFICATIONS:
UL E316080
KEMA-KEUR, VDE, FIMKO,
ENEC, CEBEC, NEMKO, DEMKO

Notes

Material

POLYCARBONATE
COLOR: CLEAR

Units: millimeters
Dimension without tolerances details to:
.xxx = ±.013
.xx = ±.13
.x = ±.3
None = ±.8
∠ = ±0.5°
Dimension Formatted mm/[in]

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Drawn
Approved

CAS
KAC

6/15/2017
6/15/2017

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No
Title

HCPM-4
HELACON PLUS MINI PUSH-IN
STYLE WIRE CONNECTOR, 4-PORT,
CLEAR

Drawing-No
17-1031-001-CSU

PRODUCTION : Phase

Scale
Project Number
Format
Sheet

5:1
PRP17-1031
B
1/1