




BY1-D/1P

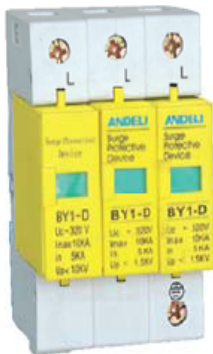

BY1-D/3P

9. BY1-D/2 & BY1-D/4

Type	BY1-D/2	BY1-D/4
Class	D	D
Rated voltage U_n (V)	220	380
Max continuous operating voltage U_c (V)	320	220
Protection level U_p (KV)	< 1.0	< 1.0
Max discharge current I_{max} (8/20 μ S) (KA)	10	10
Nominal discharge current (8/20 μ S) I_n (KA)	5	5
Response time T (ns)	<25	<25
Temperature range	-40°C ~ +80°C	-40°C ~ +80°C
Max back up fuse	16A gl	16A gl
Material	PBT	PBT
Color (module/base)	Yellow/gray	Yellow/gray
Normal model	BY1-D/2-320	BY1-D/4-320
With alarm model	BY1-D/2-320B	BY1-D/4-320B
With remote control contact model	BY1-D/2-320X	BY1-D/4-320X