




JQX-16FS/T92



JQX-16FS/T92



Contact specification

Contact form	1Z、1H、1D
Contact resistance	≤100mΩ (1A 6VDC)
Contact material	AgCdO AgSnO ₂
Contact capacity	NO: 30A 240VAC/28VDC NC: 20A 240VAC/28VDC

Technical specification

Insulation resistance	≥1000MΩ (500VDC)
Dielectric strength	Between coil and contact ≥2500VAC 1min
	Between open contacts ≥1500VAC 1min
Operate / Release time	≤15ms/10ms
Terminal type	PCB and quick terminal mounting

Coil specification


Rated coil power	DC 0.9W
------------------	---------

Coil data

Nominal voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω ± 10%
5	3.75	0.5	30
6	4.5	0.6	45
9	6.75	0.9	100
12	9.0	1.2	160
15	11.25	1.5	260
18	13.5	1.8	385
24	18.0	2.4	660
48	36.0	4.8	2560
70	52.5	7.0	5500
110	82.5	11	13450

Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

JQX-16FS/T92 Outline dimension

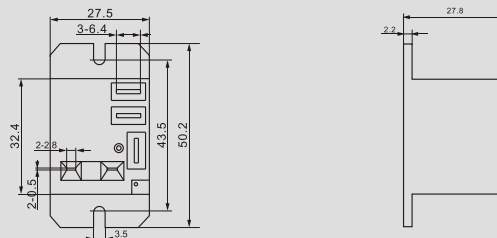

JQX-16FS/T92 Wiring diagram (Bottom view)

