



AS403(RL15)




AS404(JD1929)

Contact specification AS403


Contact form	1H、1Z
Contact resistance	≤50mΩ (1A 6VDC)
Contact material	AgCdO AgSnO2
Contact capacity	30A 12VDC

Technical specification


Insulation resistance	≥50mΩ (500VDC)
Dielectric strength	Between coil and contact ≥500VAC 1min
	Between open contacts ≥500VAC 1min
Operate / Release time	≤15ms/10ms
Terminal type	Quick terminal mounting



AS403 1Z 1H



As404 1Z 1H



Coil specification


Rated coil power	1.8W
------------------	------

Coil data


Nominal voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω ± 10%
5	3.5	0.5	16
6	4.2	0.6	20
12	8.4	1.2	85
24	16.8	2.4	320

Outline dimension、Mounting holes (Bottom view)、Wiring diagram (Bottom view)

AS403 Outline dimension

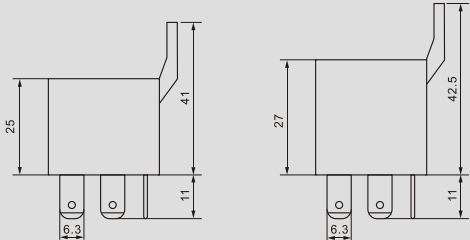

AS403 Mounting holes (Bottom view)



AS403 Wiring diagram (Bottom view)

