

Belanko™

double pole switches and cooker control unit



6 170 72












6 170 76

Colour: White T084

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches
10	N 6 170 73	 20 A - 250 V~ 1 gang - 1 way switch
10	6 170 70	 1 gang - 1-way switch + red neon indicator
10	6 170 71	 1 gang - 1-way switch + red neon indicator + earth connection
10	6 170 72	 1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking
10	6 170 74	 32 A - 250 V~ 1 gang - 1-way switch + red neon indicator, white rocker
10	6 170 75	 45 A - 250 V~ 1 gang - 1-way switch
10	6 170 76	 1 gang - 1-way switch + red neon indicator
5	6 170 77	 2 gang - 1-way vertical switch + red neon indicator
5	6 170 78	 Cooker control Unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon

Belanko™

dimmers and ventilation control



6 170 31



6 170 35



6 170 33






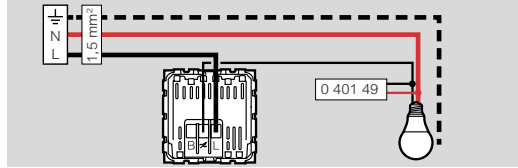



Technical characteristics [see e-catalogue](#)

Colour: White T084. Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 170 30	 600 W R dimmer (230 V only) Rotary on/off dimmer - 50 Hz 1 gang - 1-way 40-600 W (230 V) for incandescent and halogen lamps
1	6 170 31	 1000 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way 60-1000 W (230 V) / 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour 60-1000 VA (230 V) / 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V
1	6 170 32	 1500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way 60-1500 W (230 V) / 60-750 W (127 V) for incandescent and halogen lamps 60-900 VA (230 V) / 60-450 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour 60-1500 VA (230 V) / 60-750 VA (127 V) for halogen lamps with ferromagnetic transformers Can be mounted on 1 gang or 2 gang boxes Slider at the back to select 230 V or 127 V
1	6 170 35	 300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off
1	N 0 401 49	 Active Power Compensator Allow 2-wire electronic switches without neutral to be compatible with all loads (LED, fluocompact...) 
1	6 170 33	 Ventilation control Conform to BS EN 60669-1 Fan control 250 V~ 50 Hz