

| Voltage Range | 90 ÷ 264VAC |
|----------------------------------|---------------|
| Frequency Range | 47 ÷ 63Hz |
| Efiiciency (typ.) | 81.71% |
| AC Current (typ.) | 0.3A / 230VAC |
| No load Power Consumption (max.) | 0.075W |

| PROTECTIONS | |
|---------------|-----------------------------------|
| Overload | Range: 105-200% |
| oventia | Auto-recovery. |
| Short Circuit | Type: hiccup mode, auto-recovery. |
| Over Voltage | Type: auto-recovery. |

POSB12100A-25 series

12V / 1A Wall mounted type AC/DC adaptor



| WORKING ENVIRONMENT | |
|----------------------------------|---|
| Working Temperature | -10°C ÷ 45°C |
| Working Humidity | 5 ÷ 90% RH non-condensing |
| Storage Temperature and Humidity | -20°C ÷ 85°C, 5 ÷ 90% RH non-condensing |

SAFETY and EMC REGULATIONS


| Safety Standards | Compliance to EN 60950-1 |
|----------------------|--|
| Withstand Voltage | IN/OUT: 3.6kVAC |
| Isolation Resistance | IN/OUT: 50MΩ/500VDC/25°C/70% |
| EMC Emission | Compliance to EN55032 |
| EMC Immunity | Compliance to EN61000-4-2, -3, -4, -5 |
| Harmonic Current | Compliance to EN61000-3-3; EN61000-3-2 |
| | |


OTHERS

| DC wire and plug | Wire: 22AWG*2C, length = 1200mm | Plug: 2.5/5.5, positive inside |
|-------------------------|------------------------------------|--------------------------------|
| Net Weight / Dimensions | 91.6g / 67 x 38 x 74mm (L x W x H) | |

Net Weight / Dimensions

MECHANICAL SPECIFICATION

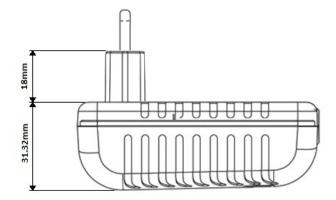




POSB12100A-25 series

12V / 1A Wall mounted type AC/DC adaptor

MECHANICAL SPECIFICATION: DC wire and plug

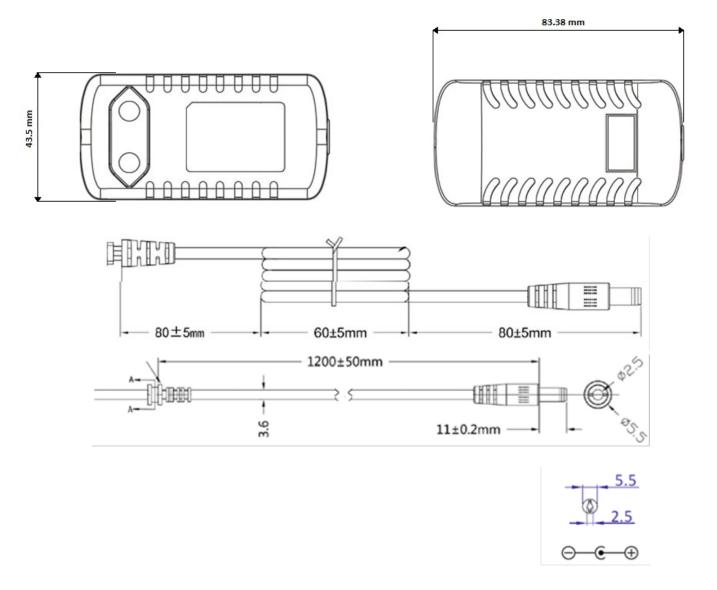

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.

3. Tolerance includes set up tolerance, line regulation and load regulation.

 Setup and rise time is measured from 0 to 90% rated output voltage.
Setup and rise time is component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

