



CorePro LEDcandle

CorePro LEDcandle ND 7-60W E14 840 B38 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E14 [E14]
RoHS mark	RoHS mark
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	7-60W
Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux (Nom)	830 lm
Luminous Flux (Rated) (Nom)	830 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	118.00 lm/W
Color Consistency	<6
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	7 W
Lamp Current (Nom)	65 mA
Wattage Equivalent	60 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	90 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted (FR)
Approval and Application	
Energy Efficiency Label	A++
Energy Consumption kWh/1000 h	7 kWh
Product Data	
Full product code	871869670305200
Order product name	CorePro LEDcandle ND 7-60W E14 840 B38
	FR
EAN/UPC - Product	8718696703052

CorePro LEDcandle

Order code	70305200
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001325402

Net Weight (Piece)	0.063 kg
--------------------	----------



Dimensional drawing



Candle 230V 8-60W 806lm 4000K E14 ND FR


Product	D	C
CorePro LEDcandle ND 7-60W E14 840 B38 FR	38 mm	114 mm

Photometric data

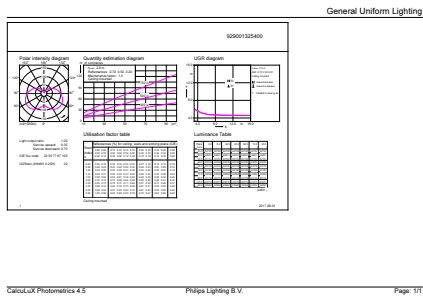

LEDbulb 60W E14 840 FR B38


LEDbulb 60W E14 827 FR B38

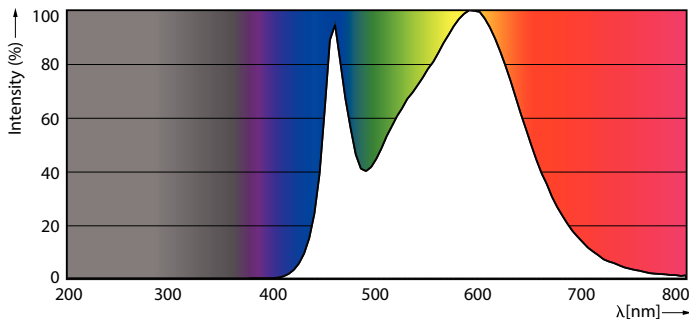

LEDbulb 60W E14 840 FR B38

CorePro LEDcandle

Lifetime

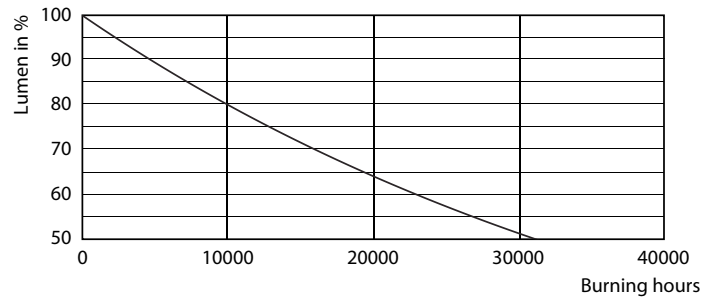

LEDbulb 60W E14 827 FR B38

LEDbulb 60W E14 827 FR B38

