

Efficient fluorescent lighting with improved color rendering

MASTER TL-D Super 80

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Benefits

- Good color rendering
- Relatively high efficacy, both initially and during lamp lifetime, with high lumen maintenance
- Create atmospheres from warm white to cool daylight

Features

- Highly efficient 3-band fluorescent coating
- High initial light output compared with standard colors
- Low mercury dose
- Can be used with conventional or electronic gear
- Higher efficacy is achieved with electronic gear

Application

- Suitable for use in a wide range of luminaires for TL-D fluorescent lamps for 'human' applications such as schools, offices, shops, factory halls etc.

MASTER TL-D Super 80


Versions



G13, T8

MASTER TL-D Super 80

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 14W/840 SLV/25	28 mm	361.2 mm	368.3 mm	365.9 mm	375.4 mm
MASTER TL-D Super 80 1m 36W/840 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 58W/835 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 30W/865 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 58W/830 UNP/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/830 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 36W/827 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 70W/830 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm
MASTER TL-D Super 80 15W/830 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 38W/830 SLV/25	28 mm	1047.0 mm	1054.1 mm	1051.7 mm	1061.2 mm
MASTER TL-D Super 80 15W/865 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 18W/830 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/830 UNP/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 70W/840 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm
MASTER TL-D Super 80 58W/830 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 23W/830 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 18W/840 UNP/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 1m 36W/865 1SL/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 23W/840 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 38W/840 SLV/25	28 mm	1047.0 mm	1054.1 mm	1051.7 mm	1061.2 mm


MASTER TL-D Super 80

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 58W/865 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/840 UNP/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 1m 36W/830 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 30W/830 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
TLDRS16W-S84ECO 25PK	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 UNP/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TLDRS16W-S83ECO 25PK	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 15W/840 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 36W/835 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 18W/835 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 58W/827 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 18W/827 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/830 UNP/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 15W/827 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 30W/827 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 70W/835 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm


MASTER TL-D Super 80

Dimensional drawing

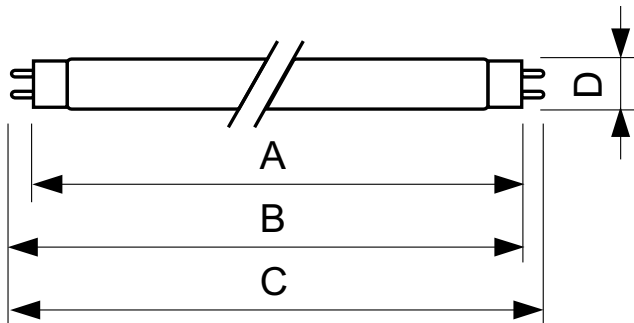

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/850 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 58W/865 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
TL-D 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
TL-D 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 18W/850 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Product
TLDRS32W-S85ECO 25PK
TLDRS32W-S84ECO 25PK
TLDRS16W-S85ECO 25PK
TLDRS32W-S83ECO 25PK



General Information

Cap-Base

G13

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Saving Product	Energy Efficiency Label (EEL)	Mercury (Hg) Content (Nom)	Picogram Per Lumen Hour
927850073002	TLDRS16W-S83ECO 25PK	20 kWh	-	A	3.0 mg	-
927850074102	TLDRS16W-S84ECO 25PK	20 kWh	-	A	3.0 mg	-
927850085002	TLDRS16W-S85ECO 25PK	-	Energy Saving	-	1.7 mg	54 pg/lm.h
927869773002	TLDRS32W-S83ECO 25PK	-	Energy Saving	-	1.7 mg	27 pg/lm.h
927869774112	TLDRS32W-S84ECO 25PK	-	Energy Saving	-	3.0 mg	27 pg/lm.h
927869775002	TLDRS32W-S85ECO 25PK	-	Energy Saving	-	3.0 mg	-
927981184024	TL-D 18W/840 1SL/25	-	-	A	2.0 mg	-
927981185024	TL-D 18W/850 1SL/25	-	-	A	2.0 mg	-
927981186524	TL-D 18W/865 1SL/25	-	-	A	2.0 mg	-
927981383024	TL-D 36W/830 1SL/25	-	-	A	2.0 mg	-
927981384024	TL-D 36W/840 1SL/25	-	-	A	2.0 mg	-
927981385024	TL-D 36W/850 1SL/25	-	-	A	2.0 mg	-
927981386524	TL-D 36W/865 1SL/25	-	-	A	2.0 mg	-
927981584024	TL-D 58W/840 1SL/25	-	-	A	2.0 mg	-
927981586524	TL-D 58W/865 1SL/25	-	-	A	2.0 mg	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	22 kWh	-	A	2.0 mg	-
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	22 kWh	-	A	2.0 mg	-
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	22 kWh	-	A	2.0 mg	-
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	22 kWh	-	A	2.0 mg	-
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	22 kWh	-	A	2.0 mg	-

MASTER TL-D Super 80

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Saving	Energy Efficiency	Mercury (Hg) Content (Nom)	Picogram Per Lumen
			Product	Label (EEL)		Hour
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	22 kWh	-	A	2.0 mg	-
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	22 kWh	-	A	2.0 mg	-
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	22 kWh	-	A	2.0 mg	-
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	36 kWh	-	A	2.0 mg	-
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	36 kWh	-	A	2.0 mg	-
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	36 kWh	-	A	2.0 mg	-
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	36 kWh	-	A	2.0 mg	-
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	42 kWh	-	A	2.0 mg	-
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	42 kWh	-	A	2.0 mg	-
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	42 kWh	-	A	2.0 mg	-
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	42 kWh	-	A	2.0 mg	-
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	42 kWh	-	A	2.0 mg	-
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	42 kWh	-	A	2.0 mg	-
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	42 kWh	-	A	2.0 mg	-
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	42 kWh	-	A	2.0 mg	-
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	42 kWh	-	A	2.0 mg	-
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	68 kWh	-	A	2.0 mg	-
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	68 kWh	-	A	2.0 mg	-
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	68 kWh	-	A	2.0 mg	-
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	68 kWh	-	A	2.0 mg	-
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	68 kWh	-	A	2.0 mg	-
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	68 kWh	-	A	2.0 mg	-
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	68 kWh	-	A	2.0 mg	-
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	19 kWh	-	B	2.0 mg	-
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	19 kWh	-	B	2.0 mg	-
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	19 kWh	-	B	2.0 mg	-
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	19 kWh	-	B	2.0 mg	-
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	28 kWh	-	A	2.0 mg	-
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	28 kWh	-	A	2.0 mg	-
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	42 kWh	-	A	2.0 mg	-
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	42 kWh	-	A	2.0 mg	-
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	43 kWh	-	A	2.0 mg	-
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	45 kWh	-	A	2.0 mg	-
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	45 kWh	-	A	2.0 mg	-
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	81 kWh	-	A	3.0 mg	-
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	81 kWh	-	A	3.0 mg	-
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	81 kWh	-	A	3.0 mg	-
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	17 kWh	-	B	2 mg	-

Controls and Dimming

Order Code	Full Product Name	Dimmable	Order Code	Full Product Name	Dimmable
927850073002	TLDRS16W-S83ECO 25PK	Yes	927981184024	TL-D 18W/840 1SL/25	Yes
927850074102	TLDRS16W-S84ECO 25PK	Yes	927981185024	TL-D 18W/850 1SL/25	Yes
927850085002	TLDRS16W-S85ECO 25PK	-	927981186524	TL-D 18W/865 1SL/25	Yes
927869773002	TLDRS32W-S83ECO 25PK	-	927981383024	TL-D 36W/830 1SL/25	Yes
927869774112	TLDRS32W-S84ECO 25PK	-	927981384024	TL-D 36W/840 1SL/25	Yes
927869775002	TLDRS32W-S85ECO 25PK	-	927981385024	TL-D 36W/850 1SL/25	Yes

MASTER TL-D Super 80

Order Code	Full Product Name	Dimmable
927981386524	TL-D 36W/865 1SL/25	Yes
927981584024	TL-D 58W/840 1SL/25	Yes
927981586524	TL-D 58W/865 1SL/25	Yes
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	Yes
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	Yes
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	Yes
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	Yes
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	Yes
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	Yes
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	Yes
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	Yes
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	Yes
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	Yes
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	Yes
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	Yes
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	Yes
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	Yes
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	Yes
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	Yes
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	Yes
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	Yes
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	Yes
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	Yes
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	Yes
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	Yes

Order Code	Full Product Name	Dimmable
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	Yes
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	Yes
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	Yes
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	Yes
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	Yes
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	Yes
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	Yes
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	Yes
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	Yes
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	Yes
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	Yes
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	Yes
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	Yes
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	Yes
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	Yes
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	Yes
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	Yes
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	Yes
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	Yes
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	Yes
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	Yes

Operating and Electrical

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
927850073002	TLDRS16W-S83ECO 25PK	0.265 A	-	16 W
927850074102	TLDRS16W-S84ECO 25PK	0.265 A	-	16 W
927850085002	TLDRS16W-S85ECO 25PK	-	-	17 W
927869773002	TLDRS32W-S83ECO 25PK	-	-	32 W
927869774112	TLDRS32W-S84ECO 25PK	-	-	32 W
927869775002	TLDRS32W-S85ECO 25PK	-	-	32 W
927981184024	TL-D 18W/840 1SL/25	0.360 A	59 V	18 W
927981185024	TL-D 18W/850 1SL/25	0.360 A	59 V	18 W
927981186524	TL-D 18W/865 1SL/25	0.360 A	59 V	18 W
927981383024	TL-D 36W/830 1SL/25	0.440 A	103 V	36 W
927981384024	TL-D 36W/840 1SL/25	0.440 A	103 V	36 W
927981385024	TL-D 36W/850 1SL/25	0.440 A	103 V	36 W
927981386524	TL-D 36W/865 1SL/25	0.440 A	103 V	36 W
927981584024	TL-D 58W/840 1SL/25	0.670 A	111 V	58 W
927981586524	TL-D 58W/865 1SL/25	0.670 A	111 V	58 W
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	0.360 A	-	18.0 W
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	0.360 A	-	18.0 W
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	0.360 A	-	18.0 W

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	0.360 A	-	18.0 W
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	0.360 A	-	18 W
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	0.360 A	-	18 W
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	0.360 A	-	18 W
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	0.360 A	-	18.0 W
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	0.360 A	-	30.0 W
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	0.360 A	-	30.0 W
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	0.360 A	-	30.0 W
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	0.360 A	-	30.0 W
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	0.440 A	-	36.0 W

MASTER TL-D Super 80

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	0.440 A	-	36.0 W
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	0.440 A	-	36.0 W
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	0.440 A	-	36.0 W
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	0.440 A	-	36.0 W
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	0.440 A	-	36.0 W
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	0.440 A	-	36.0 W
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	0.440 A	-	36.0 W
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	0.440 A	-	36.0 W
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	0.670 A	-	58.5 W
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	0.670 A	-	58.5 W
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	0.670 A	-	58.5 W
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	0.670 A	-	58.5 W
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	0.670 A	-	58.5 W
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	0.670 A	-	58.5 W
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	0.670 A	-	58.5 W
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	0.340 A	-	15.0 W
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	0.340 A	-	15.0 W
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	0.335 A	-	15.0 W
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	0.335 A	-	15.0 W
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	0.295 A	-	23.0 W
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	0.295 A	-	23.0 W
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	0.560 A	-	36.0 W
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	0.560 A	-	36 W
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	0.560 A	-	36.0 W
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	0.430 A	-	38.0 W
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	0.430 A	-	38.0 W
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	0.690 A	-	70.0 W
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	0.690 A	-	70.0 W
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	0.690 A	-	70.0 W
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	0.380 A	-	14.0 W

General Information (1/2)

Order Code	Full Product Name	Life To 50%			Life 12-Hr		Life 3-Hr	
		Failures Preheat (Nom)	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)	Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]	Instant Start [Hrs]	Life 3-Hr Program Start [Hrs]
927850073002	TLDRS16W-S83ECO 25PK	-	-	8000 h	-	-	-	-
927850074102	TLDRS16W-S84ECO 25PK	-	-	8000 h	-	-	-	-
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927981184024	TL-D 18W/840 1SL/25	20000 h	10000 h	13000 h	-	-	-	-
927981185024	TL-D 18W/850 1SL/25	20000 h	10000 h	13000 h	-	-	-	-
927981186524	TL-D 18W/865 1SL/25	20000 h	10000 h	13000 h	-	-	-	-
927981383024	TL-D 36W/830 1SL/25	20000 h	10000 h	15000 h	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	Life To 50%	Life To 10%	Life To 50%	Life 12-Hr		Life 3-Hr	
		Failures Preheat (Nom)			Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]	Instant Start [Hrs]	Life 3-Hr Program Start [Hrs]
927981384024	TL-D 36W/840 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981385024	TL-D 36W/850 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981386524	TL-D 36W/865 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981584024	TL-D 58W/840 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981586524	TL-D 58W/865 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	Life To 50%	Life To 10%	Life To 50%	Life 12-Hr		Life 3-Hr	Life 3-Hr
		Failures Preheat (Nom)			Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]		
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-

General Information (2/2)

Order Code	Full Product Name	LSF 12000 h	LSF 16000 h	LSF 2000 h	LSF 20000 h	LSF 4000 h	LSF 6000 h	LSF 8000 h
		Rated	Rated	Rated	Rated	Rated	Rated	Rated
927850073002	TLDRS16W-S83ECO 25PK	-	-	-	-	-	-	-
927850074102	TLDRS16W-S84ECO 25PK	-	-	-	-	-	-	-
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	-	-	-	-
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	-	-	-	-
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	-	-	-	-
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	-	-	-	-
927981184024	TL-D 18W/840 1SL/25	-	-	-	-	-	-	-
927981185024	TL-D 18W/850 1SL/25	-	-	-	-	-	-	-
927981186524	TL-D 18W/865 1SL/25	-	-	-	-	-	-	-
927981383024	TL-D 36W/830 1SL/25	-	-	-	-	-	-	-
927981384024	TL-D 36W/840 1SL/25	-	-	-	-	-	-	-
927981385024	TL-D 36W/850 1SL/25	-	-	-	-	-	-	-
927981386524	TL-D 36W/865 1SL/25	-	-	-	-	-	-	-
927981584024	TL-D 58W/840 1SL/25	-	-	-	-	-	-	-
927981586524	TL-D 58W/865 1SL/25	-	-	-	-	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %

MASTER TL-D Super 80

Order Code	Full Product Name	LSF 12000 h	LSF 16000 h	LSF 2000 h	LSF 20000 h	LSF 4000 h	LSF 6000 h	LSF 8000 h
		Rated	Rated	Rated	Rated	Rated	Rated	Rated
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %

Light Technical (1/3)

Order Code	Full Product Name	Color Code	Color Designation	Correlated Color	Color Rendering	LLMF 12000 h	LLMF 16000 h	LLMF 2000 h
				Temperature (Nom)	Index (Nom)	Rated	Rated	Rated
927850073002	TLDRS16W-S83ECO 25PK	830	Warm White (WW)	3000 K	85	-	-	-
927850074102	TLDRS16W-S84ECO 25PK	840	Cool White (CW)	4000 K	85	-	-	-
927850085002	TLDRS16W-S85ECO 25PK	TL850	TL850	5000 K	82	-	-	-
927869773002	TLDRS32W-S83ECO 25PK	TL830	TL830	3000 K	78	-	-	-
927869774112	TLDRS32W-S84ECO 25PK	TL841	TL841	4100 K	82	-	-	-
927869775002	TLDRS32W-S85ECO 25PK	TL850	TL850	5000 K	80	-	-	-
927981184024	TL-D 18W/840 1SL/25	840	Cool White (CW)	4000 K	82	-	-	-
927981185024	TL-D 18W/850 1SL/25	850	Daylight	5000 K	80	-	-	-
927981186524	TL-D 18W/865 1SL/25	865	Cool Daylight	6500 K	80	-	-	-
927981383024	TL-D 36W/830 1SL/25	830	Warm White (WW)	3000 K	83	-	-	-
927981384024	TL-D 36W/840 1SL/25	840	Cool White (CW)	4000 K	82	-	-	-
927981385024	TL-D 36W/850 1SL/25	850	Daylight	5000 K	80	-	-	-
927981386524	TL-D 36W/865 1SL/25	865	Cool Daylight	6500 K	80	-	-	-
927981584024	TL-D 58W/840 1SL/25	840	Cool White (CW)	4000 K	82	-	-	-
927981586524	TL-D 58W/865 1SL/25	865	Cool Daylight	6500 K	80	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	827	Incandescent White	2700 K	>80	92 %	91 %	96 %
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	835	White (WH)	3500 K	85	92 %	91 %	96 %
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	865	Cool Daylight	6500 K	85	92 %	91 %	96 %
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	827	Incandescent White	2700 K	>80	92 %	91 %	96 %
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	865	Cool Daylight	6500 K	80	92 %	91 %	96 %
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	827	Incandescent White	2700 K	>80	92 %	91 %	96 %
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %

MASTER TL-D Super 80

Order Code	Full Product Name	Color Code	Color Designation	Correlated Color	Color Rendering	LLMF 12000 h	LLMF 16000 h	LLMF 2000 h
				Temperature (Nom)	Index (Nom)	Rated	Rated	Rated
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	835	White (WH)	3500 K	>80	92 %	91 %	96 %
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	865	Cool Daylight	6500 K	85	92 %	91 %	96 %
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	827	Incandescent White	2700 K	>80	92 %	91 %	96 %
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	835	White (WH)	3500 K	>80	92 %	91 %	96 %
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	865	Cool Daylight	6500 K	85	92 %	91 %	96 %
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	827	Incandescent White	2700 K	>80	92 %	91 %	96 %
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	865	Cool Daylight	6500 K	>80	92 %	91 %	96 %
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	865	Cool Daylight	6500 K	>80	92 %	91 %	96 %
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	830	Warm White (WW)	3000 K	>80	92 %	91 %	96 %
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	835	White (WH)	3500 K	>80	92 %	91 %	96 %
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	840	Cool White (CW)	4000 K	>80	92 %	91 %	96 %
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	840	Cool Daylight	4000 K	85	92 %	91 %	96 %

Light Technical (2/3)

Order Code	Full Product Name	LLMF	Lumen				Design		
		20000 h	LLMF 4000	LLMF 6000	LLMF 8000	Maintenance	Maintenance	Luminous Efficacy	Mean
		Rated	h Rated	h Rated	h Rated	2000 h (Nom)	5000 h (Nom)	(rated) (Nom)	Lumens
927850073002	TLDRS16W-S83ECO 25PK	-	-	-	-	-	-	-	1220 lm
927850074102	TLDRS16W-S84ECO 25PK	-	-	-	-	-	-	-	1200 lm
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	-	-	-	-	1235 lm
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	-	-	-	-	2470 lm
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	-	-	-	-	2470 lm
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	-	-	-	-	2650 lm
927981184024	TL-D 18W/840 1SL/25	-	-	-	-	96 %	94 %	75 lm/W	-
927981185024	TL-D 18W/850 1SL/25	-	-	-	-	96 %	94 %	73 lm/W	-
927981186524	TL-D 18W/865 1SL/25	-	-	-	-	96 %	94 %	71 lm/W	-
927981383024	TL-D 36W/830 1SL/25	-	-	-	-	96 %	94 %	90 lm/W	-
927981384024	TL-D 36W/840 1SL/25	-	-	-	-	96 %	94 %	90 lm/W	-
927981385024	TL-D 36W/850 1SL/25	-	-	-	-	96 %	94 %	88 lm/W	-
927981386524	TL-D 36W/865 1SL/25	-	-	-	-	96 %	94 %	85 lm/W	-

MASTER TL-D Super 80

Order Code	Full Product Name	LLMF	Lumen				Lumen	Luminous Efficacy (rated) (Nom)	Design	Luminous Flux (Nom)
		20000 h Rated	LLMF 4000 h Rated	LLMF 6000 h Rated	LLMF 8000 h Rated	Maintenance 2000 h (Nom)	Maintenance 5000 h (Nom)		Mean Lumens	
927981584024	TL-D 58W/840 1SL/25	-	-	-	-	96 %	94 %	89 lm/W	-	-
927981586524	TL-D 58W/865 1SL/25	-	-	-	-	96 %	94 %	83 lm/W	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	90 %	95 %	94 %	93 %	-	-	75 lm/W	-	1350 lm
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	90 %	95 %	94 %	93 %	-	-	68 lm/W	-	1300 lm
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	90 %	95 %	94 %	93 %	-	-	80 lm/W	-	2400 lm
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	80 lm/W	-	2400 lm
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	80 lm/W	-	2400 lm
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	90 %	95 %	94 %	93 %	-	-	76.7 lm/W	-	2300 lm
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	90 %	95 %	94 %	93 %	-	-	93 lm/W	-	3350 lm
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	90 %	95 %	94 %	93 %	-	-	84 lm/W	-	3250 lm
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm

MASTER TL-D Super 80

Order Code	Full Product Name	LLMF	Lumen				Lumen	Luminous Efficacy (rated) (Nom)	Design	Luminous Flux (Nom)
		20000 h Rated	LLMF 4000 h Rated	LLMF 6000 h Rated	LLMF 8000 h Rated	Maintenance 2000 h (Nom)	Maintenance 5000 h (Nom)		Mean Lumens	
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	90 %	95 %	94 %	93 %	-	-	90 lm/W	-	5240 lm
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	90 %	95 %	94 %	93 %	-	-	81 lm/W	-	5000 lm
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	90 %	95 %	94 %	93 %	-	-	67 lm/W	-	1000 lm
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	90 %	95 %	94 %	93 %	-	-	67 lm/W	-	1000 lm
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	67 lm/W	-	1000 lm
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	90 %	95 %	94 %	93 %	-	-	-	-	930 lm
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	90 %	95 %	94 %	93 %	-	-	89 lm/W	-	2050 lm
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	89 lm/W	-	2050 lm
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	90 %	95 %	94 %	93 %	-	-	86 lm/W	-	3100 lm
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	86 lm/W	-	3100 lm
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	90 %	95 %	94 %	93 %	-	-	82 lm/W	-	2950 lm
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	90 %	95 %	94 %	93 %	-	-	88 lm/W	-	3350 lm
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	88 lm/W	-	3350 lm
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	90 %	95 %	94 %	93 %	-	-	89 lm/W	-	6200 lm
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	90 %	95 %	94 %	93 %	-	-	89 lm/W	-	6200 lm
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	89 lm/W	-	6200 lm
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	90 %	95 %	94 %	93 %	-	-	63 lm/W	-	860 lm

Light Technical (3/3)

Order Code	Full Product Name	Luminous Flux (Rated) (Nom)	Order Code	Full Product Name	Luminous Flux (Rated) (Nom)
927850073002	TLDRS16W-S83ECO 25PK	1220 lm	927850085002	TLDRS16W-S85ECO 25PK	-
927850074102	TLDRS16W-S84ECO 25PK	1200 lm	927869773002	TLDRS32W-S83ECO 25PK	-

MASTER TL-D Super 80

Order Code	Full Product Name	Luminous Flux (Rated) (Nom)
927869774112	TLDRS32W-S84ECO 25PK	-
927869775002	TLDRS32W-S85ECO 25PK	-
927981184024	TL-D 18W/840 1SL/25	1350 lm
927981185024	TL-D 18W/850 1SL/25	1310 lm
927981186524	TL-D 18W/865 1SL/25	1275 lm
927981383024	TL-D 36W/830 1SL/25	3250 lm
927981384024	TL-D 36W/840 1SL/25	3250 lm
927981385024	TL-D 36W/850 1SL/25	3170 lm
927981386524	TL-D 36W/865 1SL/25	3070 lm
927981584024	TL-D 58W/840 1SL/25	5150 lm
927981586524	TL-D 58W/865 1SL/25	4800 lm
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	1350 lm
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	1350 lm
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	1350 lm
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	1350 lm
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	1350 lm
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	1350 lm
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	1350 lm
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	1300 lm
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	2400 lm
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	2400 lm
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	2400 lm
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	2300 lm
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	3350 lm
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	3350 lm
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	3350 lm
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	3350 lm
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	3350 lm
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	3350 lm

Order Code	Full Product Name	Luminous Flux (Rated) (Nom)
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	3350 lm
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	3350 lm
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	3250 lm
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	5240 lm
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	5240 lm
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	5240 lm
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	5240 lm
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	5240 lm
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	5240 lm
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	5240 lm
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	5240 lm
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	5240 lm
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	5000 lm
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	1000 lm
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	1000 lm
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	1000 lm
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	930 lm
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	2050 lm
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	2050 lm
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	3100 lm
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	3100 lm
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	2950 lm
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	3350 lm
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	3350 lm
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	6200 lm
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	6200 lm
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	6200 lm
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	860 lm

Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
927850073002	TLDRS16W-S83ECO 25PK	T8
927850074102	TLDRS16W-S84ECO 25PK	T8
927850085002	TLDRS16W-S85ECO 25PK	T-8 (T8)
927869773002	TLDRS32W-S83ECO 25PK	T-8 (T8)
927869774112	TLDRS32W-S84ECO 25PK	T-8 (T8)
927869775002	TLDRS32W-S85ECO 25PK	T-8 (T8)
927981184024	TL-D 18W/840 1SL/25	T8
927981185024	TL-D 18W/850 1SL/25	T8
927981186524	TL-D 18W/865 1SL/25	T8
927981383024	TL-D 36W/830 1SL/25	T8
927981384024	TL-D 36W/840 1SL/25	T8
927981385024	TL-D 36W/850 1SL/25	T8
927981386524	TL-D 36W/865 1SL/25	T8
927981584024	TL-D 58W/840 1SL/25	T8
927981586524	TL-D 58W/865 1SL/25	T8
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	T8
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	T8
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	T8
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	T8

Order Code	Full Product Name	Bulb Shape
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	T8
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	T8
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	T8
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	T8
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	T8
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	T8
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	T8
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	T8
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	T8
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	T8
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	T8
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	T8
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	T8
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	T8
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	T8
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	T8
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	T8
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	T8
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	T8

MASTER TL-D Super 80

Order Code	Full Product Name	Bulb Shape
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	T8
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	T8
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	T8
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	T8
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	T8
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	T8
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	T8
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	T8
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	T8

Order Code	Full Product Name	Bulb Shape
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	T8
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	T8
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	T8
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	T8
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	T8
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	T8
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	T8
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	T8
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	T8
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	T8
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	T8

Temperature

Order Code	Full Product Name	Design Temperature (Nom)
927850073002	TLDRS16W-S83ECO 25PK	25 °C
927850074102	TLDRS16W-S84ECO 25PK	25 °C
927850085002	TLDRS16W-S85ECO 25PK	-
927869773002	TLDRS32W-S83ECO 25PK	-
927869774112	TLDRS32W-S84ECO 25PK	-
927869775002	TLDRS32W-S85ECO 25PK	-
927981184024	TL-D 18W/840 1SL/25	-
927981185024	TL-D 18W/850 1SL/25	-
927981186524	TL-D 18W/865 1SL/25	-
927981383024	TL-D 36W/830 1SL/25	-
927981384024	TL-D 36W/840 1SL/25	-
927981385024	TL-D 36W/850 1SL/25	-
927981386524	TL-D 36W/865 1SL/25	-
927981584024	TL-D 58W/840 1SL/25	-
927981586524	TL-D 58W/865 1SL/25	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	25 °C
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	25 °C
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	25 °C
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	25 °C
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	25 °C
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	25 °C
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	25 °C
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	25 °C
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	25 °C
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	25 °C
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	25 °C
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	25 °C
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	25 °C
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	25 °C
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	25 °C
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	25 °C

Order Code	Full Product Name	Design Temperature (Nom)
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	25 °C
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	25 °C
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	25 °C
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	25 °C
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	25 °C
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	25 °C
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	25 °C
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	25 °C
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	25 °C
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	25 °C
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	25 °C
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	25 °C
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	25 °C
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	25 °C
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	25 °C
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	25 °C
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	25 °C
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	25 °C
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	25 °C
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	25 °C
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	25 °C
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	25 °C
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	25 °C
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	25 °C
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	25 °C
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	25 °C
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	25 °C

MASTER TL-D Super 80

