

Efficient fluorescent lighting with improved color rendering

MASTER TL-D Super 80

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Benefits

- Good color rendering
- Relatively high efficacy, both initially and during lamp lifetime, with high lumen maintenance
- Create atmospheres from warm white to cool daylight

Features

- Highly efficient 3-band fluorescent coating
- High initial light output compared with standard colors
- Low mercury dose
- Can be used with conventional or electronic gear
- Higher efficacy is achieved with electronic gear

Application

- Suitable for use in a wide range of luminaires for TL-D fluorescent lamps for 'human' applications such as schools, offices, shops, factory halls etc.

MASTER TL-D Super 80

Versions





G13, T8

G13, T8

G13, T8

MASTER TL-D Super 80

Dimensional drawing



Product
TLDRS16W-S85ECO 25PK
TLDRS32W-S85ECO 25PK
TLDRS32W-S84ECO 25PK
TLDRS32W-S83ECO 25PK

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TLDRS16W-S84ECO 25PK	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TLDRS16W-S83ECO 25PK	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/827 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 58W/830 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 14W/840 SLV/25	28 mm	361.2 mm	368.3 mm	365.9 mm	375.4 mm
MASTER TL-D Super 80 70W/840 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm
MASTER TL-D Super 80 70W/835 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm
MASTER TL-D Super 80 70W/830 SLV/25	28 mm	1763.8 mm	1770.9 mm	1768.5 mm	1778 mm
MASTER TL-D Super 80 38W/840 SLV/25	28 mm	1047.0 mm	1054.1 mm	1051.7 mm	1061.2 mm
MASTER TL-D Super 80 38W/830 SLV/25	28 mm	1047.0 mm	1054.1 mm	1051.7 mm	1061.2 mm
MASTER TL-D Super 80 1m 36W/865 1SL/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 1m 36W/840 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 1m 36W/830 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 23W/865 1SL/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 23W/840 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm
MASTER TL-D Super 80 23W/830 SLV/25	28 mm	970.0 mm	977.1 mm	974.7 mm	984.2 mm

MASTER TL-D Super 80


Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 15W/865 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 15W/840 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 15W/830 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 15W/827 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
MASTER TL-D Super 80 58W/865 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 UNP/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/835 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/830 UNP/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/830 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 58W/827 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
MASTER TL-D Super 80 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/840 UNP/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/835 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/830 UNP/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 36W/827 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
MASTER TL-D Super 80 30W/865 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 30W/830 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 30W/827 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm
MASTER TL-D Super 80 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/840 UNP/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

MASTER TL-D Super 80

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/835 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/830 UNP/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/830 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
MASTER TL-D Super 80 18W/827 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 58W/865 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
TL-D 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 36W/850 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 36W/840 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 36W/830 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
TL-D 18W/865 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 18W/850 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
TL-D 18W/840 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

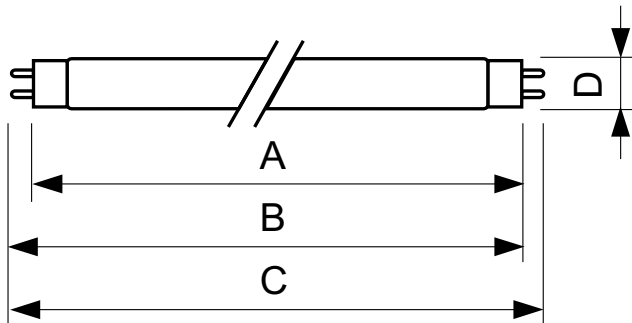

General Information

Cap-Base

G13

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Saving	Energy Efficiency	Picogram Per Lumen	
			Product	Label (EEL)	Mercury (Hg) Content (Nom)	Hour
927850073002	TLDRS16W-S83ECO 25PK	20 kWh	-	A	3.0 mg	-
927850074102	TLDRS16W-S84ECO 25PK	20 kWh	-	A	3.0 mg	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	22 kWh	-	A	2.0 mg	-
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	22 kWh	-	A	2.0 mg	-
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	22 kWh	-	A	2.0 mg	-
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	22 kWh	-	A	2.0 mg	-
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	22 kWh	-	A	2.0 mg	-
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	22 kWh	-	A	2.0 mg	-
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	22 kWh	-	A	2.0 mg	-
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	22 kWh	-	A	2.0 mg	-
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	22 kWh	-	A	2.0 mg	-
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	36 kWh	-	A	2.0 mg	-
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	36 kWh	-	A	2.0 mg	-
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	36 kWh	-	A	2.0 mg	-
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	36 kWh	-	A	2.0 mg	-
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	42 kWh	-	A	2.0 mg	-
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	42 kWh	-	A	2.0 mg	-
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	42 kWh	-	A	2.0 mg	-
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	42 kWh	-	A	2.0 mg	-
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	42 kWh	-	A	2.0 mg	-
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	42 kWh	-	A	2.0 mg	-

MASTER TL-D Super 80

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Saving	Energy Efficiency	Mercury (Hg) Content (Nom)	Picogram Per Lumen
			Product	Label (EEL)		Hour
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	42 kWh	-	A	2.0 mg	-
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	42 kWh	-	A	2.0 mg	-
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	42 kWh	-	A	2.0 mg	-
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	68 kWh	-	A	2.0 mg	-
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	68 kWh	-	A	2.0 mg	-
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	68 kWh	-	A	2.0 mg	-
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	68 kWh	-	A	2.0 mg	-
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	68 kWh	-	A	2.0 mg	-
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	68 kWh	-	A	2.0 mg	-
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	68 kWh	-	A	2.0 mg	-
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	68 kWh	-	A	2.0 mg	-
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	19 kWh	-	B	2.0 mg	-
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	19 kWh	-	B	2.0 mg	-
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	19 kWh	-	B	2.0 mg	-
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	19 kWh	-	B	2.0 mg	-
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	28 kWh	-	A	2.0 mg	-
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	28 kWh	-	A	2.0 mg	-
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	28 kWh	-	A	2.0 mg	-
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	42 kWh	-	A	2.0 mg	-
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	42 kWh	-	A	2.0 mg	-
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	43 kWh	-	A	2.0 mg	-
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	45 kWh	-	A	2.0 mg	-
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	45 kWh	-	A	2.0 mg	-
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	81 kWh	-	A	3.0 mg	-
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	81 kWh	-	A	3.0 mg	-
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	81 kWh	-	A	3.0 mg	-
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	17 kWh	-	B	2 mg	-
927850085002	TLDRS16W-S85ECO 25PK	-	Energy Saving	-	1.7 mg	54 pg/lm.h
927869773002	TLDRS32W-S83ECO 25PK	-	Energy Saving	-	1.7 mg	27 pg/lm.h
927869774112	TLDRS32W-S84ECO 25PK	-	Energy Saving	-	3.0 mg	27 pg/lm.h
927869775002	TLDRS32W-S85ECO 25PK	-	Energy Saving	-	3.0 mg	-
927981184024	TL-D 18W/840 1SL/25	-	-	A	2.0 mg	-
927981185024	TL-D 18W/850 1SL/25	-	-	A	2.0 mg	-
927981186524	TL-D 18W/865 1SL/25	-	-	A	2.0 mg	-
927981383024	TL-D 36W/830 1SL/25	-	-	A	2.0 mg	-
927981384024	TL-D 36W/840 1SL/25	-	-	A	2.0 mg	-
927981385024	TL-D 36W/850 1SL/25	-	-	A	2.0 mg	-
927981386524	TL-D 36W/865 1SL/25	-	-	A	2.0 mg	-
927981584024	TL-D 58W/840 1SL/25	-	-	A	2.0 mg	-
927981586524	TL-D 58W/865 1SL/25	-	-	A	2.0 mg	-

Controls and Dimming

Order Code	Full Product Name	Dimmable	Order Code	Full Product Name	Dimmable
927850073002	TLDRS16W-S83ECO 25PK	Yes	927920083069	MASTER TL-D Super 80 18W/830 UNP/25	Yes
927850074102	TLDRS16W-S84ECO 25PK	Yes	927920083523	MASTER TL-D Super 80 18W/835 1SL/25	Yes
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	Yes	927920084023	MASTER TL-D Super 80 18W/840 1SL/25	Yes
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	Yes	927920084055	MASTER TL-D Super 80 18W/840 1SL/25	Yes
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	Yes	927920084069	MASTER TL-D Super 80 18W/840 UNP/25	Yes

MASTER TL-D Super 80

Order Code	Full Product Name	Dimmable
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	Yes
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	Yes
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	Yes
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	Yes
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	Yes
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	Yes
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	Yes
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	Yes
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	Yes
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	Yes
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	Yes
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	Yes
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	Yes
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	Yes
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	Yes
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	Yes
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	Yes
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	Yes
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	Yes
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	Yes
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	Yes
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	Yes
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	Yes
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	Yes
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	Yes

Order Code	Full Product Name	Dimmable
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	Yes
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	Yes
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	Yes
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	Yes
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	Yes
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	Yes
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	Yes
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	Yes
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	Yes
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	Yes
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	Yes
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	Yes
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	Yes
927850085002	TLDRS16W-S85ECO 25PK	-
927869773002	TLDRS32W-S83ECO 25PK	-
927869774112	TLDRS32W-S84ECO 25PK	-
927869775002	TLDRS32W-S85ECO 25PK	-
927981184024	TL-D 18W/840 1SL/25	Yes
927981185024	TL-D 18W/850 1SL/25	Yes
927981186524	TL-D 18W/865 1SL/25	Yes
927981383024	TL-D 36W/830 1SL/25	Yes
927981384024	TL-D 36W/840 1SL/25	Yes
927981385024	TL-D 36W/850 1SL/25	Yes
927981386524	TL-D 36W/865 1SL/25	Yes
927981584024	TL-D 58W/840 1SL/25	Yes
927981586524	TL-D 58W/865 1SL/25	Yes

Operating and Electrical

Order Code	Full Product Name	Lamp		Power
		Current (Nom)	Voltage (Nom)	(Rated) (Nom)
927850073002	TLDRS16W-S83ECO 25PK	0.265 A	-	16 W
927850074102	TLDRS16W-S84ECO 25PK	0.265 A	-	16 W
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	0.360 A	-	18.0 W
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	0.360 A	-	18.0 W
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	0.360 A	-	18.0 W
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	0.360 A	-	18.0 W
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	0.360 A	-	18.0 W
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	0.360 A	-	18 W
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	0.360 A	-	18 W
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	0.360 A	-	18 W

Order Code	Full Product Name	Lamp		Power
		Current (Nom)	Voltage (Nom)	(Rated) (Nom)
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	0.360 A	-	18.0 W
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	0.360 A	-	30.0 W
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	0.360 A	-	30.0 W
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	0.360 A	-	30.0 W
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	0.360 A	-	30.0 W
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	0.440 A	-	36.0 W
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	0.440 A	-	36.0 W
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	0.440 A	-	36.0 W
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	0.440 A	-	36.0 W

MASTER TL-D Super 80

Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)	Order Code	Full Product Name	Lamp Current (Nom)	Voltage (Nom)	Power (Rated) (Nom)
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	0.440 A	-	36.0 W	927922583014	MASTER TL-D Super 80 23W/830 SLV/25	0.295 A	-	23.0 W
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	0.440 A	-	36.0 W	927922584014	MASTER TL-D Super 80 23W/840 SLV/25	0.295 A	-	23.0 W
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	0.440 A	-	36.0 W	927922586514	MASTER TL-D Super 80 23W/865 1SL/25	0.295 A	-	23.0 W
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	0.440 A	-	36.0 W	927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	0.560 A	-	36.0 W
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	0.440 A	-	36.0 W	927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	0.560 A	-	36 W
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	0.670 A	-	58.5 W	927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	0.560 A	-	36.0 W
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	0.670 A	-	58.5 W	927923583014	MASTER TL-D Super 80 38W/830 SLV/25	0.430 A	-	38.0 W
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	0.670 A	-	58.5 W	927923584014	MASTER TL-D Super 80 38W/840 SLV/25	0.430 A	-	38.0 W
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	0.670 A	-	58.5 W	927923883014	MASTER TL-D Super 80 70W/830 SLV/25	0.690 A	-	70.0 W
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	0.670 A	-	58.5 W	927923883514	MASTER TL-D Super 80 70W/835 SLV/25	0.690 A	-	70.0 W
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W	927923884014	MASTER TL-D Super 80 70W/840 SLV/25	0.690 A	-	70.0 W
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W	928024384001	MASTER TL-D Super 80 14W/840 SLV/25	0.380 A	-	14.0 W
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	0.670 A	-	58.5 W	927850085002	TLDRS16W-S85ECO 25PK	-	-	17 W
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	0.670 A	-	58.5 W	927869773002	TLDRS32W-S83ECO 25PK	-	-	32 W
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	0.670 A	-	58.5 W	927869774112	TLDRS32W-S84ECO 25PK	-	-	32 W
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	0.340 A	-	15.0 W	927869775002	TLDRS32W-S85ECO 25PK	-	-	32 W
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	0.340 A	-	15.0 W	927981184024	TL-D 18W/840 1SL/25	0.360 A	59 V	18 W
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	0.335 A	-	15.0 W	927981185024	TL-D 18W/850 1SL/25	0.360 A	59 V	18 W
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	0.335 A	-	15.0 W	927981186524	TL-D 18W/865 1SL/25	0.360 A	59 V	18 W
					927981383024	TL-D 36W/830 1SL/25	0.440 A	103 V	36 W
					927981384024	TL-D 36W/840 1SL/25	0.440 A	103 V	36 W
					927981385024	TL-D 36W/850 1SL/25	0.440 A	103 V	36 W
					927981386524	TL-D 36W/865 1SL/25	0.440 A	103 V	36 W
					927981584024	TL-D 58W/840 1SL/25	0.670 A	111 V	58 W
					927981586524	TL-D 58W/865 1SL/25	0.670 A	111 V	58 W

General Information (1/2)

Order Code	Full Product Name	Life To 50%			Life 12-Hr		Life 3-Hr	
		Failures Preheat (Nom)	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)	Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]	Instant Start [Hrs]	Life 3-Hr Program Start [Hrs]
927850073002	TLDRS16W-S83ECO 25PK	-	-	8000 h	-	-	-	-
927850074102	TLDRS16W-S84ECO 25PK	-	-	8000 h	-	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	Life To 50%			Life 12-Hr		Life 3-Hr	
		Failures Preheat (Nom)	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)	Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]	Instant Start [Hrs]	Life 3-Hr Program Start [Hrs]
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	20000 h	12000 h	15000 h	-	-	-	-
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	20000 h	12000 h	15000 h	-	-	-	-
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	20000 h	12000 h	15000 h	-	-	-	-
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	30000 h	36000 h	24000 h	30000 h
927981184024	TL-D 18W/840 1SL/25	20000 h	10000 h	13000 h	-	-	-	-
927981185024	TL-D 18W/850 1SL/25	20000 h	10000 h	13000 h	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	Life To 50%			Life 12-Hr		Life 3-Hr	Life 3-Hr
		Failures Preheat (Nom)	Life To 10% Failures (Nom)	Life To 50% Failures (Nom)	Instant Start [Hrs]	Life 12-Hr Programstart [Hrs]	Instant Start [Hrs]	Program Start [Hrs]
927981186524	TL-D 18W/865 1SL/25	20000 h	10000 h	13000 h	-	-	-	-
927981383024	TL-D 36W/830 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981384024	TL-D 36W/840 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981385024	TL-D 36W/850 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981386524	TL-D 36W/865 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981584024	TL-D 58W/840 1SL/25	20000 h	10000 h	15000 h	-	-	-	-
927981586524	TL-D 58W/865 1SL/25	20000 h	10000 h	15000 h	-	-	-	-

General Information (2/2)

Order Code	Full Product Name	LSF 12000 h	LSF 16000 h	LSF 2000 h	LSF 20000 h	LSF 4000 h	LSF 6000 h	LSF 8000 h
		Rated	Rated	Rated	Rated	Rated	Rated	Rated
927850073002	TLDRS16W-S83ECO 25PK	-	-	-	-	-	-	-
927850074102	TLDRS16W-S84ECO 25PK	-	-	-	-	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %

MASTER TL-D Super 80

Order Code	Full Product Name	LSF 12000 h	LSF 16000 h	LSF 2000 h	LSF 20000 h	LSF 4000 h	LSF 6000 h	LSF 8000 h
		Rated	Rated	Rated	Rated	Rated	Rated	Rated
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	89 %	33 %	99 %	2 %	97 %	96 %	95 %
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	89 %	33 %	99 %	2 %	99 %	99 %	99 %
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	-	-	-	-
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	-	-	-	-
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	-	-	-	-
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	-	-	-	-
927981184024	TL-D 18W/840 1SL/25	-	-	-	-	-	-	-
927981185024	TL-D 18W/850 1SL/25	-	-	-	-	-	-	-
927981186524	TL-D 18W/865 1SL/25	-	-	-	-	-	-	-
927981383024	TL-D 36W/830 1SL/25	-	-	-	-	-	-	-
927981384024	TL-D 36W/840 1SL/25	-	-	-	-	-	-	-
927981385024	TL-D 36W/850 1SL/25	-	-	-	-	-	-	-
927981386524	TL-D 36W/865 1SL/25	-	-	-	-	-	-	-
927981584024	TL-D 58W/840 1SL/25	-	-	-	-	-	-	-
927981586524	TL-D 58W/865 1SL/25	-	-	-	-	-	-	-

Light Technical (1/3)

Order Code	Full Product Name	Chromaticity	Chromaticity			Correlated Color	Color	LLMF 12000 h
		Coordinate X (Nom)	Coordinate Y (Nom)	Color Code	Color Designation	Temperature (Nom)	Rendering Index (Nom)	Rated
927850073002	TLDRS16W-S83ECO 25PK	444	410	830	Warm White (WW)	3000 K	85	-
927850074102	TLDRS16W-S84ECO 25PK	383	386	840	Cool White (CW)	4000 K	85	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	463	420	827	Incandescent White	2700 K	85	92 %
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	468	417	827	Incandescent White	2700 K	85	92 %
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	440	403	830	Warm White (WW)	3000 K	85	92 %
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	440	403	830	Warm White (WW)	3000 K	85	92 %
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	409	394	835	White (WH)	3500 K	85	92 %
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	380	380	840	Cool White (CW)	4000 K	85	92 %
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	85	92 %
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	380	380	840	Cool White (CW)	4000 K	85	92 %
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	313	337	865	Cool Daylight	6500 K	85	92 %
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	463	420	827	Incandescent White	2700 K	85	92 %
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	440	403	830	Warm White (WW)	3000 K	85	92 %
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	380	380	840	Cool White (CW)	4000 K	85	92 %
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	313	337	865	Cool Daylight	6500 K	80	92 %
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	463	420	827	Incandescent White	2700 K	85	92 %
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	440	403	830	Warm White (WW)	3000 K	85	92 %
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	440	410	830	Warm White (WW)	3000 K	85	92 %
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	440	403	830	Warm White (WW)	3000 K	85	92 %
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	409	394	835	White (WH)	3500 K	85	92 %

MASTER TL-D Super 80

Order Code	Full Product Name	Chromaticity	Chromaticity	Correlated Color			Color		LLMF 12000 h Rated
		Coordinate X (Nom)	Coordinate Y (Nom)	Color Code	Color Designation	Temperature (Nom)	Rendering Index (Nom)	LLMF 12000 h Rated	
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	85	92 %	
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	313	337	865	Cool Daylight	6500 K	85	92 %	
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	463	420	827	Incandescent White	2700 K	85	92 %	
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	440	403	830	Warm White (WW)	3000 K	85	92 %	
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	440	410	830	Warm White (WW)	3000 K	85	92 %	
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	440	403	830	Warm White (WW)	3000 K	85	92 %	
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	409	394	835	White (WH)	3500 K	85	92 %	
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	85	92 %	
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	313	337	865	Cool Daylight	6500 K	85	92 %	
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	463	420	827	Incandescent White	2700 K	85	92 %	
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	444	410	830	Warm White (WW)	3000 K	85	92 %	
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	383	386	840	Cool White (CW)	4000 K	82	92 %	
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	313	338	865	Cool Daylight	6500 K	82	92 %	
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	444	410	830	Warm White (WW)	3000 K	83	92 %	
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	383	386	840	Cool White (CW)	4000 K	82	92 %	
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	313	338	865	Cool Daylight	6500 K	82	92 %	
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	444	410	830	Warm White (WW)	3000 K	85	92 %	
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	383	386	840	Cool White (CW)	4000 K	85	92 %	
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	313	338	865	Cool Daylight	6500 K	82	92 %	
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	444	410	830	Warm White (WW)	3000 K	85	92 %	
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	383	386	840	Cool White (CW)	4000 K	85	92 %	
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	440	403	830	Warm White (WW)	3000 K	85	92 %	
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	409	394	835	White (WH)	3500 K	85	92 %	
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	380	380	840	Cool White (CW)	4000 K	85	92 %	
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	380	380	840	Cool Daylight	4000 K	85	92 %	
927850085002	TLDRS16W-S85ECO 25PK	-	-	TL850	TL850	5000 K	82	-	
927869773002	TLDRS32W-S83ECO 25PK	-	-	TL830	TL830	3000 K	78	-	
927869774112	TLDRS32W-S84ECO 25PK	-	-	TL841	TL841	4100 K	82	-	
927869775002	TLDRS32W-S85ECO 25PK	-	-	TL850	TL850	5000 K	80	-	
927981184024	TL-D 18W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	82	-	
927981185024	TL-D 18W/850 1SL/25	347	363	850	Daylight	5000 K	80	-	
927981186524	TL-D 18W/865 1SL/25	313	338	865	Cool Daylight	6500 K	80	-	
927981383024	TL-D 36W/830 1SL/25	444	410	830	Warm White (WW)	3000 K	83	-	
927981384024	TL-D 36W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	82	-	
927981385024	TL-D 36W/850 1SL/25	347	363	850	Daylight	5000 K	80	-	
927981386524	TL-D 36W/865 1SL/25	313	338	865	Cool Daylight	6500 K	80	-	
927981584024	TL-D 58W/840 1SL/25	383	386	840	Cool White (CW)	4000 K	82	-	
927981586524	TL-D 58W/865 1SL/25	313	338	865	Cool Daylight	6500 K	80	-	

Light Technical (2/3)

Order Code	Full Product Name	LLMF	LLMF	Lumen			Lumen		Luminous Efficacy (rated) (Nom)
		16000 h Rated	LLMF 2000 h Rated	20000 h Rated	LLMF 4000 h Rated	LLMF 6000 h Rated	LLMF 8000 h Rated	Maintenance 2000 h (Nom)	
927850073002	TLDRS16W-S83ECO 25PK	-	-	-	-	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	LLMF	LLMF	LLMF	LLMF	LLMF	Lumen	Lumen	Luminous Efficacy (rated) (Nom)
		16000 h Rated	2000 h Rated	20000 h Rated	4000 h Rated	6000 h Rated	8000 h Rated	Maintenance 2000 h (Nom)	
927850074102	TLDRS16W-S84ECO 25PK	-	-	-	-	-	-	-	-
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	75 lm/W
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	68 lm/W
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	80 lm/W
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	80 lm/W
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	80 lm/W
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	76.7 lm/W
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	93 lm/W
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	84 lm/W
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	90 lm/W
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	90 lm/W

MASTER TL-D Super 80

Order Code	Full Product Name	LLMF	LLMF	LLMF	LLMF	LLMF	Lumen	Lumen	Luminous Efficacy (rated) (Nom)	
		16000 h Rated	20000 h h Rated	4000 h Rated	6000 h Rated	8000 h Rated	Maintenance 2000 h (Nom)	Maintenance 5000 h (Nom)		
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	90 lm/W
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	81 lm/W
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	67 lm/W
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	67 lm/W
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	67 lm/W
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	-
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	89 lm/W
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	89 lm/W
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	83 lm/W
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	86 lm/W
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	86 lm/W
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	82 lm/W
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	88 lm/W
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	88 lm/W
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	89 lm/W
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	89 lm/W
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	89 lm/W
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	91 %	96 %	90 %	95 %	94 %	93 %	-	-	63 lm/W
927850085002	TLDRS16W-S85ECO 25PK	-	-	-	-	-	-	-	-	-
927869773002	TLDRS32W-S83ECO 25PK	-	-	-	-	-	-	-	-	-

MASTER TL-D Super 80

Order Code	Full Product Name	LLMF	LLMF	LLMF			Lumen	Lumen	Luminous Efficacy (rated) (Nom)
		16000 h Rated	LLMF 2000 h Rated	20000 h Rated	LLMF 4000 h Rated	LLMF 6000 h Rated	LLMF 8000 h Rated	Maintenance 2000 h (Nom)	
927869774112	TLDRS32W-S84ECO 25PK	-	-	-	-	-	-	-	-
927869775002	TLDRS32W-S85ECO 25PK	-	-	-	-	-	-	-	-
927981184024	TL-D 18W/840 1SL/25	-	-	-	-	-	96 %	94 %	75 lm/W
927981185024	TL-D 18W/850 1SL/25	-	-	-	-	-	96 %	94 %	73 lm/W
927981186524	TL-D 18W/865 1SL/25	-	-	-	-	-	96 %	94 %	71 lm/W
927981383024	TL-D 36W/830 1SL/25	-	-	-	-	-	96 %	94 %	90 lm/W
927981384024	TL-D 36W/840 1SL/25	-	-	-	-	-	96 %	94 %	90 lm/W
927981385024	TL-D 36W/850 1SL/25	-	-	-	-	-	96 %	94 %	88 lm/W
927981386524	TL-D 36W/865 1SL/25	-	-	-	-	-	96 %	94 %	85 lm/W
927981584024	TL-D 58W/840 1SL/25	-	-	-	-	-	96 %	94 %	89 lm/W
927981586524	TL-D 58W/865 1SL/25	-	-	-	-	-	96 %	94 %	83 lm/W

Light Technical (3/3)

Order Code	Full Product Name	Design			Order Code	Full Product Name	Design		
		Mean Lumens	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)			Mean Lumens	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
927850073002	TLDRS16W-S83ECO 25PK	-	1220 lm	1220 lm	927921083055	MASTER TL-D Super 80	-	3350 lm	3350 lm
927850074102	TLDRS16W-S84ECO 25PK	-	1200 lm	1200 lm		36W/830 1SL/25			
927920082723	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921083069	MASTER TL-D Super 80	-	3350 lm	3350 lm
	18W/827 1SL/25					36W/830 UNP/25			
927920082755	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921083523	MASTER TL-D Super 80	-	3350 lm	3350 lm
	18W/827 1SL/25					36W/835 1SL/25			
927920083023	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921084023	MASTER TL-D Super 80	-	3350 lm	3350 lm
	18W/830 1SL/25					36W/840 1SL/25			
927920083069	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921084055	MASTER TL-D Super 80	-	3350 lm	3350 lm
	18W/830 UNP/25					36W/840 1SL/25			
927920083523	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921084069	MASTER TL-D Super 80	-	3350 lm	3350 lm
	18W/835 1SL/25					36W/840 UNP/25			
927920084023	MASTER TL-D Super 80	-	1350 lm	1350 lm	927921086544	MASTER TL-D Super 80	-	3250 lm	3250 lm
	18W/840 1SL/25					36W/865 1SL/25			
927920084055	MASTER TL-D Super 80	-	1350 lm	1350 lm	927922082723	MASTER TL-D Super 80	-	5240 lm	5240 lm
	18W/840 1SL/25					58W/827 1SL/25			
927920084069	MASTER TL-D Super 80	-	1350 lm	1350 lm	927922083023	MASTER TL-D Super 80	-	5240 lm	5240 lm
	18W/840 UNP/25					58W/830 1SL/25			
927920086544	MASTER TL-D Super 80	-	1300 lm	1300 lm	927922083055	MASTER TL-D Super 80	-	5240 lm	5240 lm
	18W/865 1SL/25					58W/830 1SL/25			
927920582723	MASTER TL-D Super 80	-	2400 lm	2400 lm	927922083069	MASTER TL-D Super 80	-	5240 lm	5240 lm
	30W/827 SLV/25					58W/830 UNP/25			
927920583023	MASTER TL-D Super 80	-	2400 lm	2400 lm	927922083523	MASTER TL-D Super 80	-	5240 lm	5240 lm
	30W/830 1SL/25					58W/835 1SL/25			
927920584023	MASTER TL-D Super 80	-	2400 lm	2400 lm	927922084023	MASTER TL-D Super 80	-	5240 lm	5240 lm
	30W/840 1SL/25					58W/840 1SL/25			
927920586514	MASTER TL-D Super 80	-	2300 lm	2300 lm	927922084055	MASTER TL-D Super 80	-	5240 lm	5240 lm
	30W/865 SLV/25					58W/840 1SL/25			
927921082723	MASTER TL-D Super 80	-	3350 lm	3350 lm	927922084069	MASTER TL-D Super 80	-	5240 lm	5240 lm
	36W/827 1SL/25					58W/840 UNP/25			
927921083023	MASTER TL-D Super 80	-	3350 lm	3350 lm	927922084081	MASTER TL-D Super 80	-	5240 lm	5240 lm
	36W/830 1SL/25					58W/840 1SL/25			

MASTER TL-D Super 80

Order Code	Full Product Name	Design		
		Mean Lumens	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	-	5000 lm	5000 lm
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	-	1000 lm	1000 lm
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	-	1000 lm	1000 lm
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	-	1000 lm	1000 lm
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	-	930 lm	930 lm
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	-	2050 lm	2050 lm
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	-	2050 lm	2050 lm
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	-	1900 lm	1900 lm
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	-	3100 lm	3100 lm
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	-	3100 lm	3100 lm
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	-	2950 lm	2950 lm
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	-	3350 lm	3350 lm

Order Code	Full Product Name	Design		
		Mean Lumens	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	-	3350 lm	3350 lm
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	-	6200 lm	6200 lm
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	-	6200 lm	6200 lm
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	-	6200 lm	6200 lm
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	-	860 lm	860 lm
927850085002	TLDRS16W-S85ECO 25PK	1235 lm	1300 lm	-
927869773002	TLDRS32W-S83ECO 25PK	2470 lm	2600 lm	-
927869774112	TLDRS32W-S84ECO 25PK	2470 lm	2700 lm	-
927869775002	TLDRS32W-S85ECO 25PK	-	2650 lm	-
927981184024	TL-D 18W/840 1SL/25	-	-	1350 lm
927981185024	TL-D 18W/850 1SL/25	-	-	1310 lm
927981186524	TL-D 18W/865 1SL/25	-	-	1275 lm
927981383024	TL-D 36W/830 1SL/25	-	-	3250 lm
927981384024	TL-D 36W/840 1SL/25	-	-	3250 lm
927981385024	TL-D 36W/850 1SL/25	-	-	3170 lm
927981386524	TL-D 36W/865 1SL/25	-	-	3070 lm
927981584024	TL-D 58W/840 1SL/25	-	-	5150 lm
927981586524	TL-D 58W/865 1SL/25	-	-	4800 lm

Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
927850073002	TLDRS16W-S83ECO 25PK	T8
927850074102	TLDRS16W-S84ECO 25PK	T8
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	T8
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	T8
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	T8
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	T8
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	T8
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	T8
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	T8
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	T8
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	T8
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	T8
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	T8
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	T8
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	T8
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	T8
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	T8
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	T8
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	T8
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	T8
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	T8
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	T8

Order Code	Full Product Name	Bulb Shape
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	T8
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	T8
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	T8
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	T8
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	T8
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	T8
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	T8
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	T8
927922084081	MASTER TL-D Super 80 58W/840 1SL/25	T8
927922086544	MASTER TL-D Super 80 58W/865 1SL/25	T8
927922282714	MASTER TL-D Super 80 15W/827 SLV/25	T8
927922283014	MASTER TL-D Super 80 15W/830 SLV/25	T8
927922284014	MASTER TL-D Super 80 15W/840 SLV/25	T8
927922286514	MASTER TL-D Super 80 15W/865 1SL/25	T8
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	T8
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	T8
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	T8
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	T8
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	T8
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	T8

MASTER TL-D Super 80

Order Code	Full Product Name	Bulb Shape
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	T8
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	T8
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	T8
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	T8
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	T8
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	T8
927850085002	TLDRS16W-S85ECO 25PK	T-8 (T8)
927869773002	TLDRS32W-S83ECO 25PK	T-8 (T8)
927869774112	TLDRS32W-S84ECO 25PK	T-8 (T8)
927869775002	TLDRS32W-S85ECO 25PK	T-8 (T8)

Order Code	Full Product Name	Bulb Shape
927981184024	TL-D 18W/840 1SL/25	T8
927981185024	TL-D 18W/850 1SL/25	T8
927981186524	TL-D 18W/865 1SL/25	T8
927981383024	TL-D 36W/830 1SL/25	T8
927981384024	TL-D 36W/840 1SL/25	T8
927981385024	TL-D 36W/850 1SL/25	T8
927981386524	TL-D 36W/865 1SL/25	T8
927981584024	TL-D 58W/840 1SL/25	T8
927981586524	TL-D 58W/865 1SL/25	T8

Temperature

Order Code	Full Product Name	Design Temperature (Nom)
927850073002	TLDRS16W-S83ECO 25PK	25 °C
927850074102	TLDRS16W-S84ECO 25PK	25 °C
927920082723	MASTER TL-D Super 80 18W/827 1SL/25	25 °C
927920082755	MASTER TL-D Super 80 18W/827 1SL/25	25 °C
927920083023	MASTER TL-D Super 80 18W/830 1SL/25	25 °C
927920083069	MASTER TL-D Super 80 18W/830 UNP/25	25 °C
927920083523	MASTER TL-D Super 80 18W/835 1SL/25	25 °C
927920084023	MASTER TL-D Super 80 18W/840 1SL/25	25 °C
927920084055	MASTER TL-D Super 80 18W/840 1SL/25	25 °C
927920084069	MASTER TL-D Super 80 18W/840 UNP/25	25 °C
927920086544	MASTER TL-D Super 80 18W/865 1SL/25	25 °C
927920582723	MASTER TL-D Super 80 30W/827 SLV/25	25 °C
927920583023	MASTER TL-D Super 80 30W/830 1SL/25	25 °C
927920584023	MASTER TL-D Super 80 30W/840 1SL/25	25 °C
927920586514	MASTER TL-D Super 80 30W/865 SLV/25	25 °C
927921082723	MASTER TL-D Super 80 36W/827 1SL/25	25 °C
927921083023	MASTER TL-D Super 80 36W/830 1SL/25	25 °C
927921083055	MASTER TL-D Super 80 36W/830 1SL/25	25 °C
927921083069	MASTER TL-D Super 80 36W/830 UNP/25	25 °C
927921083523	MASTER TL-D Super 80 36W/835 1SL/25	25 °C
927921084023	MASTER TL-D Super 80 36W/840 1SL/25	25 °C
927921084055	MASTER TL-D Super 80 36W/840 1SL/25	25 °C
927921084069	MASTER TL-D Super 80 36W/840 UNP/25	25 °C
927921086544	MASTER TL-D Super 80 36W/865 1SL/25	25 °C
927922082723	MASTER TL-D Super 80 58W/827 1SL/25	25 °C
927922083023	MASTER TL-D Super 80 58W/830 1SL/25	25 °C
927922083055	MASTER TL-D Super 80 58W/830 1SL/25	25 °C
927922083069	MASTER TL-D Super 80 58W/830 UNP/25	25 °C
927922083523	MASTER TL-D Super 80 58W/835 1SL/25	25 °C
927922084023	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
927922084055	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
927922084069	MASTER TL-D Super 80 58W/840 UNP/25	25 °C

Order Code	Full Product Name	Design Temperature (Nom)
9279222084081	MASTER TL-D Super 80 58W/840 1SL/25	25 °C
9279222086544	MASTER TL-D Super 80 58W/865 1SL/25	25 °C
9279222282714	MASTER TL-D Super 80 15W/827 SLV/25	25 °C
9279222283014	MASTER TL-D Super 80 15W/830 SLV/25	25 °C
9279222284014	MASTER TL-D Super 80 15W/840 SLV/25	25 °C
9279222286514	MASTER TL-D Super 80 15W/865 1SL/25	25 °C
927922583014	MASTER TL-D Super 80 23W/830 SLV/25	25 °C
927922584014	MASTER TL-D Super 80 23W/840 SLV/25	25 °C
927922586514	MASTER TL-D Super 80 23W/865 1SL/25	25 °C
927923083014	MASTER TL-D Super 80 1m 36W/830 SLV/25	25 °C
927923084014	MASTER TL-D Super 80 1m 36W/840 SLV/25	25 °C
927923086514	MASTER TL-D Super 80 1m 36W/865 1SL/25	25 °C
927923583014	MASTER TL-D Super 80 38W/830 SLV/25	25 °C
927923584014	MASTER TL-D Super 80 38W/840 SLV/25	25 °C
927923883014	MASTER TL-D Super 80 70W/830 SLV/25	25 °C
927923883514	MASTER TL-D Super 80 70W/835 SLV/25	25 °C
927923884014	MASTER TL-D Super 80 70W/840 SLV/25	25 °C
928024384001	MASTER TL-D Super 80 14W/840 SLV/25	25 °C
927850085002	TLDRS16W-S85ECO 25PK	-
927869773002	TLDRS32W-S83ECO 25PK	-
927869774112	TLDRS32W-S84ECO 25PK	-
927869775002	TLDRS32W-S85ECO 25PK	-
927981184024	TL-D 18W/840 1SL/25	-
927981185024	TL-D 18W/850 1SL/25	-
927981186524	TL-D 18W/865 1SL/25	-
927981383024	TL-D 36W/830 1SL/25	-
927981384024	TL-D 36W/840 1SL/25	-
927981385024	TL-D 36W/850 1SL/25	-
927981386524	TL-D 36W/865 1SL/25	-
927981584024	TL-D 58W/840 1SL/25	-
927981586524	TL-D 58W/865 1SL/25	-

