



CorePro LEDcandle

CorePro LEDcandle ND 7-60W E14 865 B38 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data


General Information		Warm Up Time to 60% Light (Nom)		0.5 s
Cap-Base	E14 [E14]	Power Factor (Nom)		0.5
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)		220-240 V
Switching Cycle	50000X	Temperature		
Technical Type	7-60W	T-Case Maximum (Nom)		90 °C
Light Technical		Controls and Dimming		
Colour Code	865 [CCT of 6500K]	Dimmable		No
Luminous Flux (Nom)	830 lm	Mechanical and Housing		
Luminous Flux (Rated) (Nom)	830 lm	Bulb Finish		Frosted (FR)
Colour Designation	Cool Daylight	Approval and Application		
Colour Temperature, horizontal (Nom)	6500 K	Energy Efficiency Label		A++
Luminous Efficacy (rated) (Nom)	118.57 lm/W	Energy Consumption kWh/1000 h		7 kWh
Color Consistency	<6	Product Data		
Colour Rendering Index horiz (Nom)	80	Full product code		871869674685100
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order product name		CorePro LEDcandle ND 7-60W E14 865 B38 FR
Operating and Electrical		EAN/UPC - Product		8718696746851
Input Frequency	50 to 60 Hz	Order code		74685100
Power (Rated) (Nom)	7 W			
Lamp Current (Nom)	65 mA			
Wattage Equivalent	60 W			
Starting Time (Nom)	0.5 s			

CorePro LEDcandle

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394702

Net Weight (Piece)	0.063 kg
--------------------	----------


Dimensional drawing




Candle B38 7-60W 830lm 6500K E14 ND FR

Product	D	C
CorePro LEDcandle ND 7-60W E14 865 B38 FR	38 mm	114 mm


Photometric data

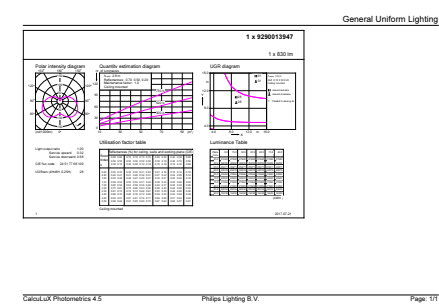

CorePro LEDcandle 60W E14 865 FR B38

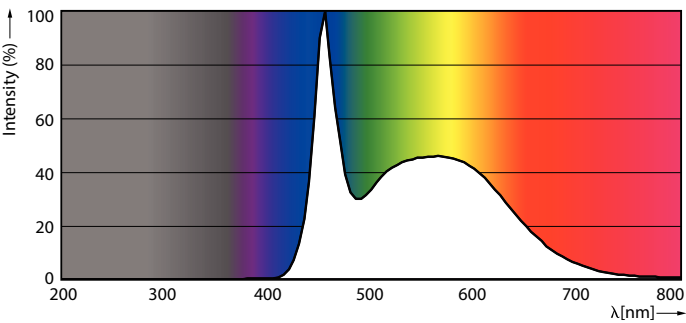


CorePro LEDcandle 60W E14 865 FR B38




CorePro LEDcandle 60W E14 865 FR B38

CorePro LEDcandle

Lifetime

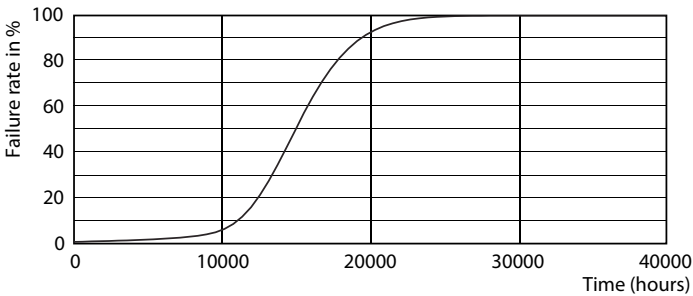

LEDbulb 60W E14 827 FR B38

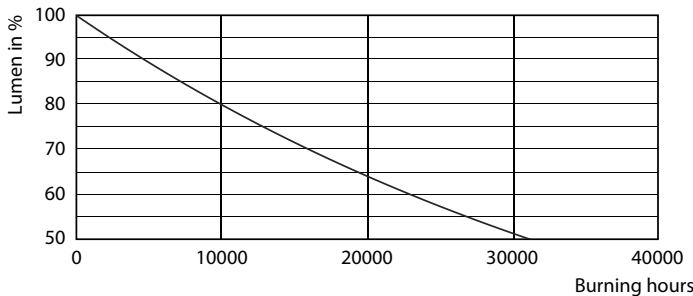

LEDbulb 60W E14 827 FR B38

