



Main

Range of product	Zelio Relay
Product or component type	Solid state relay
Device short name	SSM
Number of channels	1
Number of phases	1 phase

Complementary

Mounting support	Symmetrical DIN rail
[In] rated current	6 A
Output voltage	1...100 V DC
[Uc] control circuit voltage	4...32 V DC
Contacts type and configuration	1 NO
Tightening torque	0.5...0.8 N.m for input 0.5...0.8 N.m for output
Connections - terminals	Screw terminals: 1 x 0.3...1 x 1.5 mm ² , (AWG 22...AWG 16) for input Screw terminals: 1 x 0.3...1 x 2.5 mm ² , (AWG 22...AWG 14) for output
Maximum capacitance	10 pF for input/output
Insulation resistance	1000 MOhm at 500 V DC
Local signalling	LED (green)input status:
Minimum switching voltage	4 V DC turn-on
Maximum switching voltage	1 V DC turn-off
Input current	8...11 mA
Solid state output type	Mosfet output DC switching
Load current	0.0025...6 A
Transient overvoltage	100 V
Surge current	60 A for 10 ms
Maximum voltage drop	<0.6 V on-state

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Resistance	0.1 Ohm on-state
Maximum leakage current	0.1 mA off-state
Response time	0.6 ms (turn-on) 0.3 ms (turn-off)
Overvoltage category	III
Width	11 mm
Height	90.3 mm
Depth	83.7 mm
Net weight	0.05 kg


Environment

Flame retardance	V0 conforming to UL 94
Dielectric strength	4 kV DC for input/output 4 kV DC for input or output to case
Pollution degree	2
Standards	IEC 62314 IEC 61000 IEC 60950-1
Product certifications	UL REACH CSA
Marking	CE
IP degree of protection	IP20
Ambient air temperature for operation	-30...80 °C
Ambient air temperature for storage	-30...100 °C


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Dimensions

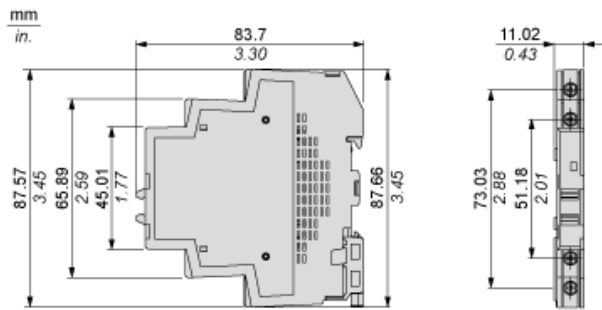

Derating Curves

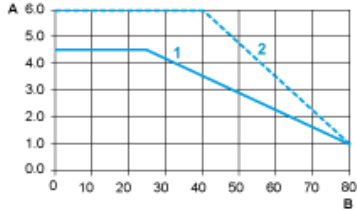

- A : Load Current (Amperes)
- B : Ambient Temperature (°C)
- 1 : Multiple units, no minimum spacing between components
- 2 : Installed single unit, distance to adjacent components more than 11 mm