




Part Number: **MS-106075-2**
 Revision 20140225 - Generated 12-Mar-2014

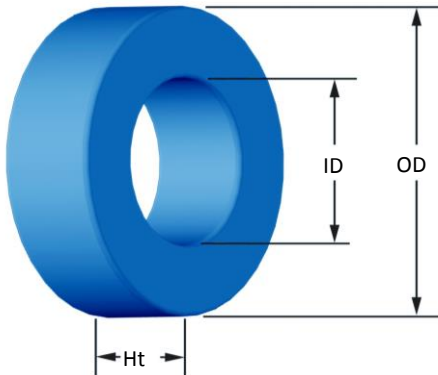

OD	(nom. - bare core)	26.92 mm	1.060 in
	(max. - after coating)	27.69 mm	1.090 in
ID	(nom. - bare core)	14.73 mm	0.580 in
	(min. - after coating)	14.10 mm	0.555 in
Ht	(nom. - bare core)	11.18 mm	0.440 in
	(max. - after coating)	11.99 mm	0.472 in
Mass	(approximate)	24 grams	
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	0.654 cm ²	
	L_e - Eff. Mag. Path Length	6.35 cm	
	V_e - Eff. Core Volume	4.15 cm ³	
	WA - Min. Eff. Window Area	1.56 cm ²	
	sa - Surface Area	28.8 cm ²	
	mlt - mean length per turn	4.46 cm	
Inductance	μ_i (reference)	75	
	A_L value (nominal)	94 nH/N ²	
	Test Winding	N=80, #26 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.23 V	
AL tolerance	±8%		
Core Loss	Core Loss(mW/cm ³): $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=7.890E+09$, $b=7.111E+08$, $c=8.980E+06$, $d=2.846E-14$		
	B_{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	323 mW/cm ³	
Core Loss (maximum)	372 mW/cm ³		
DC Saturation	$\% \mu_i \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.000E-02$, $b=3.414E-06$, $c=1.841$, $d=0.000$		
	H_{DC}	80 Oe	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	600 Pcs/Box	

Winding Table	Wire Size	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	Single Layer	Turns	12	16	20	26	33	41	52	66	82	103	129
		Rdc(Ω)	1.8 m	3.7 m	7.4 m	15.3 m	30.8 m	60.9 m	122.8 m	247.8 m	489.7 m	978.2 m	1.9
Full Winding	Turns	13	20	30	47	73	112	174	269	417	645	998	
	Rdc(Ω)	1.9 m	4.6 m	11.1 m	27.6 m	68.1 m	166.3 m	410.8 m	1.0	2.5	6.1	15.1	

