
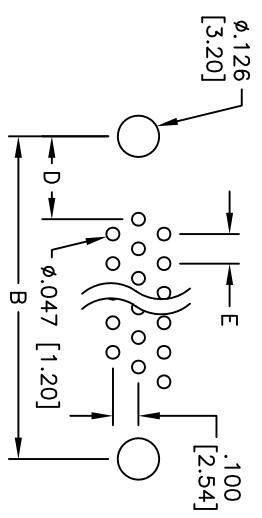
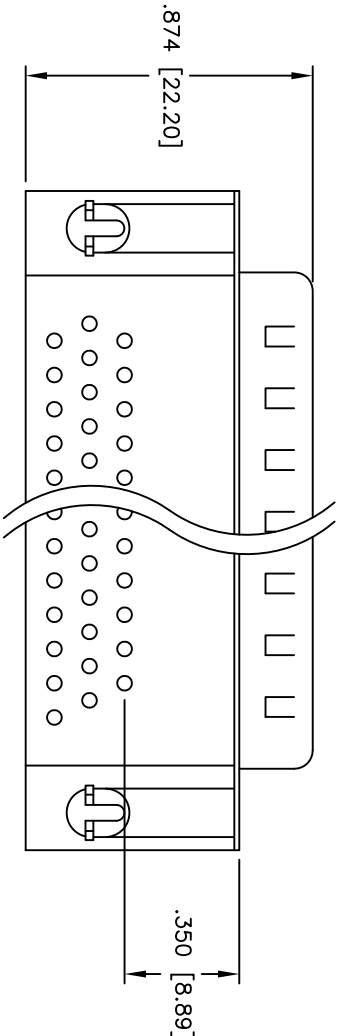
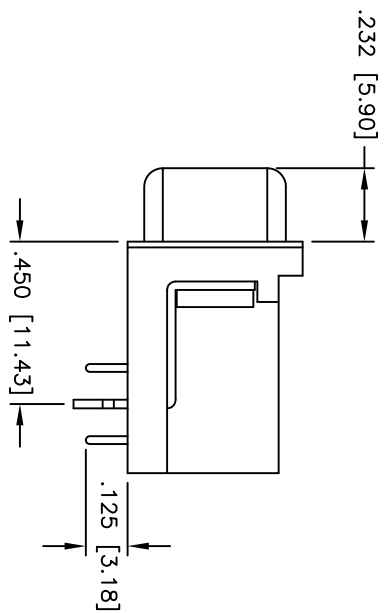


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/6/05	

APPROVED: _____
 DATE: _____ TITLE: _____

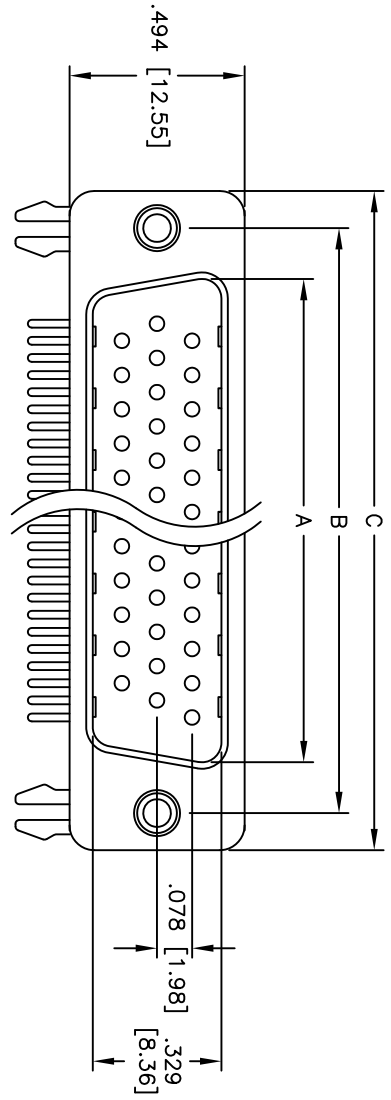

HDTXX	DIMENSIONS				
	A	B	C	D	E
15	.666 [16.92]	.984 [24.99]	1.213 [30.81]	.277 [7.04]	.090 [2.29]
26	.994 [25.25]	1.312 [33.32]	1.541 [39.14]	.271 [6.88]	.090 [2.29]
44	1.534 [38.96]	1.852 [47.04]	2.088 [53.04]	.271 [6.88]	.090 [2.29]
62	2.182 [55.42]	2.500 [63.50]	2.729 [69.32]	.276 [7.00]	.095 [2.41]

SPECIFICATIONS:
 Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated
 Hardware: Brass, Nickel plated
 Plating:
 Gold flash over Nickel underplate overall

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -65°C to +125°C
 Environmental:
 Lead free, RoHS compliant

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB PLUG, RIGHT ANGLE
 #4-40 INSERTS & FORKED BOARDLOCKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	5/6/05	
CHECKED			
APPROVED			
TITLE		SIZE	PART NO.
HIGH DENSITY D-SUB PLUG, RIGHT ANGLE		X	HDLXX-PL-B
#4-40 INSERTS & FORKED BOARDLOCKS		REF:	SCALE: NTS
		SHEET	1 OF 1

