



# **CorePro LEDspot MV**



# Corepro LEDspot 3.5-35W GU10 840 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E14 holder and are designed as a retrofit replacement for halogen or incandescent spots. LEDlamps deliver huge energy savings and minimize maintenance cost.

#### **Product data**

General information	
Cap-Base	GU10 [ GU10]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000
Technical Type	3.5-35W
Flux measurement reference	Narrow Cone
Tier	CorePro
Light technical	
Colour Code	840 [ CCT of 4000K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	275 lm
Luminous Intensity (Nom)	590 cd
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	78.00 lm/W
Color Consistency	<6
Colour Rendering Index horiz (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	275 lm

Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	3.5 W
Lamp Current (Nom)	32 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	65 ℃
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Shape	PAR16 [ PAR 2 inch]
Approval and application	
Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh


Datasheet, 2022, November 23 data subject to change

## CorePro LEDspot MV

EPREL Registration Number	391857
Product data	
Full product code	871869672835200
Order product name	Corepro LEDspot 3.5-35W GU10 840 36D
EAN/UPC - Product	8718696728352
Order code	72835200

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001218002
Net Weight (Piece)	0.045 kg


### Dimensional drawing




Corepro LEDspot 3.5-35W GU10 840 36D

# Product D C Corepro LEDspot 3.5-35W GU10 840 36D 50 mm 54 mm


#### Photometric data





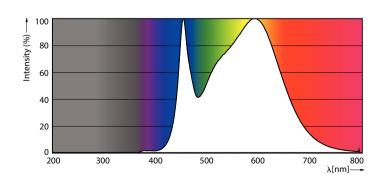


Spectral Power Distribution Colour




Light Distribution Diagram

### CorePro LEDspot MV

#### Lifetime

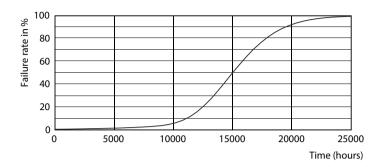

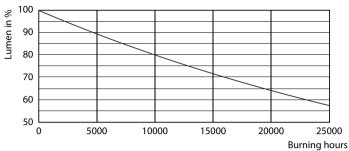

Life Expectancy Diagram

Lumen Maintenance Diagram

