



# MASTER PL-L 4 Pin



## MASTER PL-L 55W/865/4P 1CT/25

MASTER PL-L is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information		Light technical	
Cap-Base	2G11 [ 2G11]	Color Code	865 [ CCT of 6500K]
Life to 50% Failures Preheat (Nom)	20000 h	Luminous Flux (Nom)	4600 lm
System Description	High Frequency	Luminous Flux (Rated) (Nom)	4800 lm
LSF Preheat 2000 h Rated	99 %	Color Designation	Cool Daylight
LSF Preheat 4000 h Rated	99 %	Chromaticity Coordinate X (Nom)	0.313
LSF Preheat 6000 h Rated	98 %	Chromaticity Coordinate Y (Nom)	0.337
LSF Preheat 8000 h Rated	97 %	Correlated Color Temperature (Nom)	6500 K
LSF Preheat 16000 h Rated	82 %	Luminous Efficacy (rated) (Nom)	82 lm/W
LSF Preheat 20000 h Rated	50 %	Color Rendering Index (Nom)	80
Flux measurement reference	Sphere	LLMF 2000 h Rated	94 %
		LLMF 4000 h Rated	93 %

# MASTER PL-L 4 Pin

LLMF 6000 h Rated	92 %
LLMF 8000 h Rated	91 %
LLMF 12000 h Rated	90 %
LLMF 16000 h Rated	88 %
LLMF 20000 h Rated	87 %

## Operating and electrical

Power (Nom)	55.3 W
Lamp Current (Nom)	0.525 A

## Temperature

Design Temperature (Nom)	30 °C
--------------------------	-------

## Controls and dimming

Dimmable	Yes
----------	-----

## Mechanical and housing

Cap-Base Information	4 Pins
----------------------	--------


## Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	56 kWh
EPREL Registration Number	423315

## Product data

Full product code	871150026170040
Order product name	MASTER PL-L 55W/865/4P 1CT/25
EAN/UPC - Product	8711500261700
Order code	927908786570
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927908786570
Net Weight (Piece)	134.000 g
ILCOS Code	FSDH-55/65/1B-L/P-2G11


## Dimensional drawing



MASTER PL-L 55W/865/4P 1CT/25

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L 55W/865/4P 1CT/25	39.0 mm	18.0 mm	509.2 mm	535 mm	541.6 mm

## Photometric data

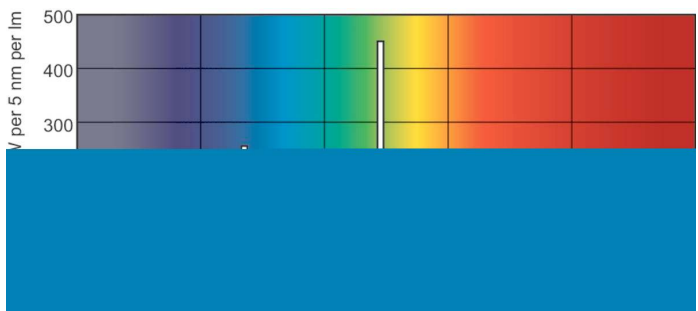

LDPB\_PLL4P\_865-Spectral power distribution B/W

LDPO\_PLL4P\_865-Spectral power distribution Colour

## MASTER PL-L 4 Pin

